

ILLUMINEX

12" Slim Panel Downlight

Simply Bright!



FEATURES

12" 24W 1680lm

Type IC rated (direct contact with insulation)

Energy Star, cETLus listed

- Dimmable
- 50,000 hour life
- Air-tight aluminum housing with PMMA lampshade in white finish
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom



INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

ADDITIONAL INFO

- White/Nickle Trim Avail.
- Operating Temperature -10°C ~+40°C

DIAGRAM

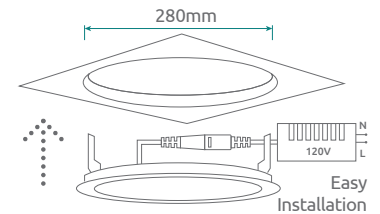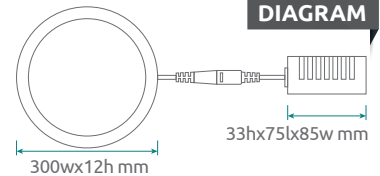

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (MM)	MOUNT SIZE	CASE QTY.
L3512-241R	YG-YGCL-24X-ETL(3000K)	ILLX SLMP 12" R 24W 3K 1680L WH	24	110-120V	1680	3000	50,000	180°	80+	44	0.98	300	280	10
L3512-242R	YG-YGCL-24X-ETL(4000K)	ILLX SLMP 12" R 24W 4K 1680L WH	24	110-120V	1680	4000	50,000	180°	80+	44	0.98	300	280	10
L3512-243R	YG-YGCL-24X-ETL(5000K)	ILLX SLMP 12" R 24W 5K 1680L WH	24	110-120V	1680	5000	50,000	180°	80+	44	0.98	300	280	10

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: information@interadwes.com | Website: www.interadwes.com

Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5