



## Bright Light, Made to Last!



High CRI



Dimmable



Intertek



## Product information

### FEATURES

- 2FT 100/160w 13000/20800LM, 4FT 200w 26000LM
- High Lumen Efficacy 130Lm/W
- DLC Premium, cETLus listed
- 0-10v Dimmable
- Polycarbonate diffuser
- Slim design
- 50,000 hour life
- Multi-volt AC120-277/347V
- Steel housing with white coating
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Gymnasium
- Warehouse
- Museum
- Recreation Center


### INSTALLATION

- Pendant
- Suspension
- Mounting: 3ft chains & hooks

### ADDITIONAL INFO

- White Finish
- Operating Temperature -20°C ~+50°C
- Suitable for dry and damp location
- Optional: Microwave Sensor

### DIAGRAM

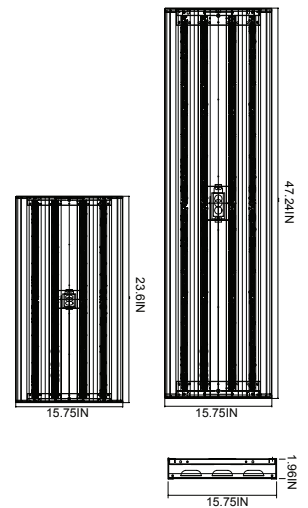

ORDER CODE	DLC MODEL	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L5522-1341	ILX-LH2FT100DHV-40K	PL5KDCC40BXN	LINEAR HIGH BAY 2FT 100W M-V 4K	100	120-347V	13000	4000K	180°	20	0.90	23.6x15.75x1.96	2
L5522-1541	ILX-LH2FT100DHV-50K	PL8AOF9FB0C3	LINEAR HIGH BAY 2FT 100W M-V 5K	100	120-347V	13000	5000K	180°	20	0.90	23.6x15.75x1.96	2
L5522-2341	ILX-LH2FT160DHV-40K	PLRUEBJGEWW1	LINEAR HIGH BAY 2FT 160W M-V 4K	160	120-347V	20800	4000K	180°	20	0.90	23.6x15.75x1.96	2
L5522-2541	ILX-LH2FT160DHV-50K	PLCPP0EGCR9Z	LINEAR HIGH BAY 2FT 160W M-V 5K	160	120-347V	20800	5000K	180°	20	0.90	23.6x15.75x1.96	2
L5524-1341	ILX-LH4FT200DHV-40K	PLULS6GP61X9	LINEAR HIGH BAY 4FT 200W M-V 4K	200	120-347V	26000	4000K	180°	20	0.90	47.24x15.75x1.96	2
L5524-1541	ILX-LH4FT200DHV-50K	PLAIPV630AEC	LINEAR HIGH BAY 4FT 200W M-V 5K	200	120-347V	26000	5000K	180°	20	0.90	47.24x15.75x1.96	2