



# KTL-FC12T9-CW

## T9 CIRCULAR FLUORESCENT LAMP

**T9 CIRCLINE**  
FLUORESCENT LAMP

### DESCRIPTION

32W T9 | 4100K | 60 CRI

<b>LAMP TYPE:</b> Circline
<b>BULB TYPE:</b> T9
<b>BASE TYPE:</b> G10q (4-Pin)
<b>WATTAGE:</b> 32W
<b>COLOR TEMPERATURE:</b> 4100K
<b>COLOR RENDERING INDEX (CRI):</b> 60
<b>WARRANTY:</b> 3 Year System/2 Year Standard

### PRODUCT FEATURES

- TCLP Compliant
- Complies with IEC-61199, IEC-60901

### OPERATING SPECIFICATIONS

#### PHOTOMETRIC CHARACTERISTICS


Initial Lumens <sup>1</sup>	1930
Mean Lumens <sup>2</sup>	1582
Lumen Maintenance	82%
Efficacy	60 lm/w

#### RATED AVERAGE LIFE

Ballast Type	3 Hours/Start	12 Hours/Start
Rapid Start	10,000 Hours	N/A*

\* 12 Hours/Start not relevant to typical residential applications.

#### LUMEN MAINTENANCE

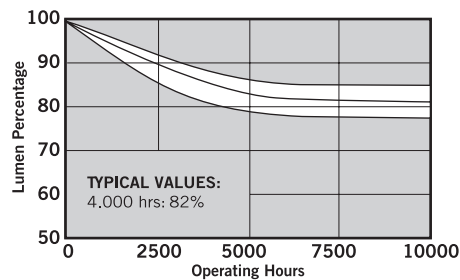

<sup>1</sup> Approximate initial lumens. Lumen output based upon performance after 100 hours of operating life. Measurements obtained during operation using a reference ballast under standard laboratory conditions at 25°C.  
<sup>2</sup> Approximate mean lumens. Lumen output based upon performance at 40% of the lamp's rated average life. Measurements obtained during operation using a reference ballast under standard laboratory conditions at 25°C.

### PHYSICAL SPECIFICATIONS

#### LAMP DIMENSIONS

	Min.	Max.
A (Inner Diameter 1)	9.44"	9.65"
B (Inner Diameter 2)	9.35"	9.55"
C, D (Outer Diameter)	11.63"	11.83"
E (Bulb Diameter)	1.10"	1.18"

**NOMINAL OUTER DIAMETER:** 12"

**BASE TYPE:** G10q (4-Pin)



# KTL-FC12T9-CW

## T9 CIRCULAR FLUORESCENT LAMP

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTL-FC12T9-CW-DP	Distributor Pack (Individually Sleeved)	12	Active

### CATALOG NUMBER BREAKDOWN

# KTL-FC12T9-CW-DP

