

METALARC PRO-TECH® – High Wattage

Metal Halide Lamps for Open and Enclosed Fixtures



SYLVANIA METALARC PRO-TECH lamps allow added flexibility by incorporating open fixture technology to a full complement of lamp wattages.

METALARC PRO-TECH metal halide lamps were created to fill the need for a safe light source for use in open fixtures and for applications where an enclosed fixture is impractical. The METALARC PRO-TECH lamp design provides an additional measure of safety in open or enclosed fixtures and includes an internal shield around the arc tube. In addition, some METALARC PRO-TECH lamps have a reduction in UV output compared to standard metal halide lamps.

With the benefit of open fixtures, these high output METALARC PRO-TECH lamps are ideal for higher ceiling applications where enclosed fixtures might previously have been necessary. The use of open fixtures means more light output over life and lower maintenance costs because there are no lenses to gather dirt and dust, thus extending lamp replacement procedures.

Application Information

Applications

- Ambient lighting for industrial and retail
- Flood lighting
- Lobbies, atriums
- Malls
- Parking lots
- Security lighting

Key Features & Benefits

- Full range of high wattage lamps from 175 through 1000 watts in medium and mogul exclusionary bases
- METALARC PRO-TECH design – shroud for containment and UV-reduction
- Open or enclosed fixture operation
- Base-Up Only operating position
- Up to 20,000 hours average rated life
- Lower maintenance costs
- Lower initial luminaire cost
- Reduced luminaire dirt depreciation by use of open fixtures
- Dedicated sockets for 175 through 1000 watt lamps for open rated fixtures
- Retrofits into standard sockets
- Available in clear and coated
- NEC 2005 and later editions require new installations or major renovations to use:
 - METALARC PRO-TECH lamps with exclusionary sockets in open fixtures, OR
 - Suitably enclosed fixtures

Product Offering

Available Wattage	Bulb Shape	Finish	Fixture Compatibility
175	ED17	Clear	Open/Enclosed
175, 250	BT28	Clear/Coated	Open/Enclosed
400	BT37	Clear/Coated	Open/Enclosed
1000	BT56	Clear/Coated	Open/Enclosed

Sockets

To prevent relamping an open fixture with standard metal halide lamps, a special socket is available with open fixtures for all lamp types.

Fixtures

Consult your local fixture agent for available fixtures.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Information

Item Number	Ordering Abbreviation	Watts	Finish	Bulb	Base ¹	ANSI Code	Average Rated	Initial Lumens	Mean Lumens	Color Temp.	CRI	Lamp Efficacy (LPW)
							Life (hours) ² Vertical					
64733	MP175/BU-ONLY/MED	175	Clear	ED17	E26 Med.	M57/O	10,000	14,400	8,600	3600K	65	82
64773	MP175/BU-ONLY	175	Clear	BT28	EX39 ³	M57/O	10,000	14,400	7,000	4000K	65	82
64404	MP250/BU-ONLY	250	Clear	BT28	EX39 ³	M58/O	10,000	22,000	16,000	4000K	65	88
64405*	MP250/C/BU-ONLY	250	Coated	BT28	EX39 ³	M58/O	10,000	20,000	14,350	3800K	70	80
64705	MP400/BU-ONLY	400	Clear	BT37	EX39 ³	M59/O	20,000	37,000	24,000	4200K	65	93
64706	MP400/C/BU-ONLY	400	Coated	BT37	EX39 ³	M59/O	20,000	34,000	22,000	4000K	65	85
64714	MP1000/BU-ONLY	1000	Clear	BT56	EX39 ³	M47/O	15,000	109,000	87,500	3500K	65	109
64716	MP1000/C/BU-ONLY	1000	Coated	BT56	EX39 ³	M47/O	15,000	102,000	82,000	3200K	65	102

*Contact your local LEDVANCE sales representative for availability.

1. For lamp wattages of 360W and greater, it is recommended that lampholders with nickel-plated copper alloy center contacts (with spring) should be used rather than electrical contacts made of stainless steel.

2. Average rated life based on 11 hours per start operating on an ANSI ballast.

3. Exclusionary mogul base.

O = Lamps classified as O-type, comply with ANSI Standard C78.389 for containment testing and may be used in open luminaires. See lamp warning.

Ordering Guide

MP	175	/	—	/	BU-ONLY	/	—
MP = METALARC PRO-TECH Open and Enclosed Fixture	Wattage: 175, 250 400, 1000		Finish __ = Clear C = Coated		Operating Position: BU-ONLY = Base Up Only		Base: __ = Mogul MED = Medium Base

Lamp Dimensions

	(A) MOL	(B) LCL	(C) Diameter
ED17	5.4" (137.2mm)	3.4" (86.4mm)	2.1" (53.3mm)
BT28	8.3" (210.8mm)	5.0" (127.0mm)	3.5" (88.9mm)
BT37	11.5" (292.1mm)	7.0" (177.8mm)	4.6" (116.8mm)
BT56	15.4" (391.2mm)	9.5" (241.3mm)	7.0" (177.8mm)


Safety Information

WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if the outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.


This product conforms to the following federal regulations: U.S.A.: 21 CFR 1040.30 and CANADA: SOR/80-381.

Technical Information

Typical Lumen Maintenance Curve

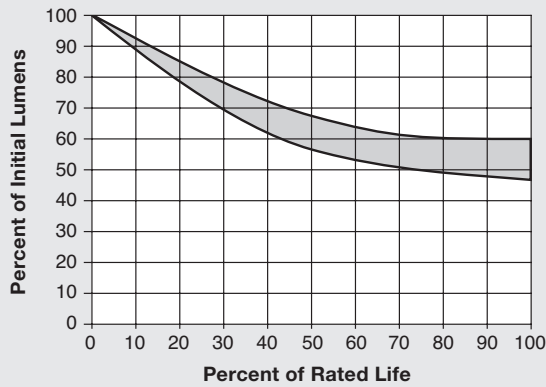


Typical Survival Curve

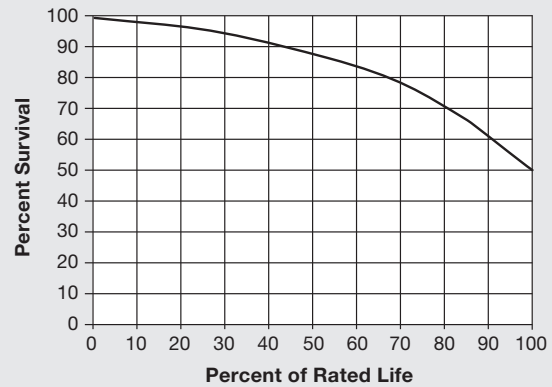


Exclusionary Socket for METALARC PRO-TECH® Lamps

Medium Based Dedicated Socket Comparison

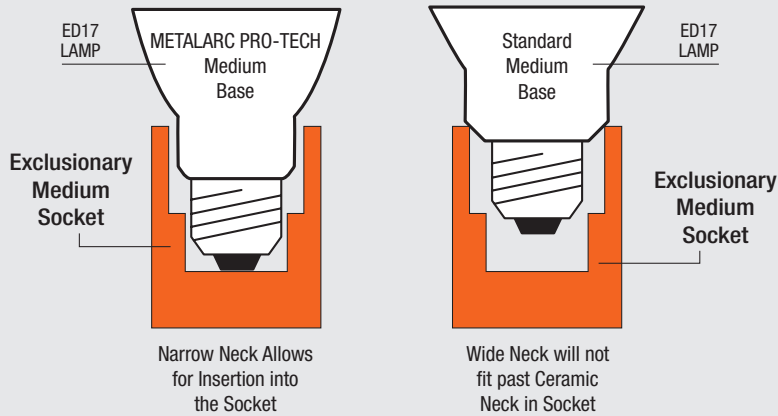

Mogul Based Dedicated Socket Comparison

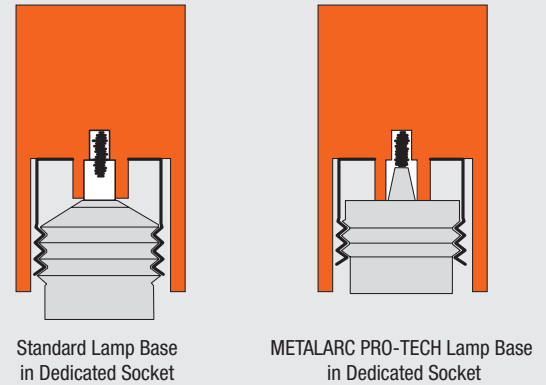

National Electric Code 2005 and later revision require new construction and/or major renovations to use exclusionary sockets (ex. EX39) in open fixtures, or fixture with a lens.

Sample Specification

Lamp(s) shall be (a) METALARC PRO-TECH MP400/BU-ONLY Lamp(s) constructed with an arc tube shroud with initial lumens of 34,000. Lamp(s) shall have a CRI of 65, CCT of 4200K, and shall be designed for open fixture operation and reduced UV output.

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
 www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

