





DESCRIPTION

1" Mini Puck LED 12V DC
 5 pack single units or 6 pack with plug-in driver
 Ultra-compact, versatile, easily connected via daisy chained low voltage cable to an either remote mounted class 2 power supply or solar inverter.
 Die cast aluminum housing
 Recessed only, great for under cabinet lighting, niche lighting, RV & trailers, off-grid solar.

FEATURES & BENEFITS

70 lm with CRI 90+
 Only 5/8" Deep
 Approved for Damp Locations
 Fast & easy to install

DIMENSIONS: ID 1" OD 1 5/16" Depth 5/8"



Cut Out 1 1/16"




Stock Trims and Light Colors



Round White 3000K
 Other Trim & Light Colors Available By Custom Order

WIRING DIAGRAM

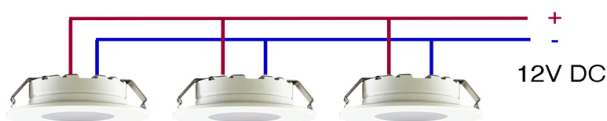

Project: _____

Location: _____

Trim: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Displays, Cabinets, Mini Recessed, Soffits, Solar
Energy Used	1 W
Color Temperature (K)	3000 (other CCTs available by custom order)
Light Output (lm)	70
Halogen Equivalent	5 W
Beam Angle	100°
CRI	90 +
Input	12V DC
Dimming	Dimmable with external 12V drivers
Approved Location	Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	3 Year

ACCESSORIES

Sold Separately



Hard Wired Driver cat # **HBL024-120-12-D**
 Triac Dimmable Input 120V AC output 12V DC 24W
 Connect Up To 20 Puck Lights To This Driver



Plug-In Driver cat # **WLS-PD30LU-24**
 Not Dimmable Input 120V AC output 12V DC 12W
 Included with 6 pack Connect Up To 10 Puck Lights To This Driver



6-Port Hub cat # **AD-107THB1**
 Included with 6 pack



Extension Cable 6 feet cat # **PEX6**

ORDERING GUIDE

Description / cat #

Sold in 2 packages



5 pack pucks only no connectors 3K white
5P-AD-108-3K



6 pack with connectors, 6 port hub and non-dimmable plug-in driver 3K white
6P-AD-108-3K-D-H