

Wet Location




### DESCRIPTION

6" Surface Mount Backlit LED Disk  
AC Input - No Driver Needed

### FEATURES & BENEFITS

Fast & Easy to Install in J-Box - Save on Labor  
Wet Location - Suitable For Showers & Soffits  
CRI 90+ for True Color Rendering  
Dimmable Down to 10% Flicker Free

**DIMENSIONS**    OD 7 3/8"    Thickness 1"

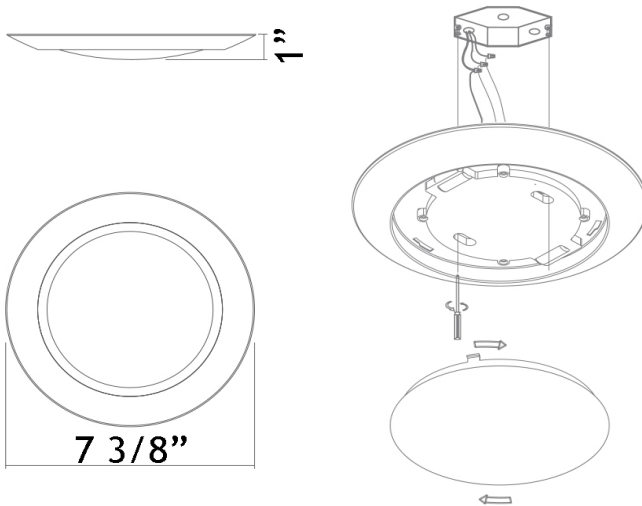

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Trim: \_\_\_\_\_

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### SPECIFICATION

SPECIFICATION	
Applications	Surface Mount
Energy Used	15 W
Color Temperature (K)	3000
Light Output (lm)	900
Halogen Equivalent	75 W
Beam Angle	120°
CRI	90 +
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Wet Locations
Air Tight	No
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year



### ORDERING GUIDE

CSC3017-LED-15W	CCT	Trim
	- xK	xx

Stock model 30K White Trim:            **CSC3017-LED-15W-3K-WH**

4000K & 5000K and Black, Bronze & Brushed Nickel Trims Available by Custom Order