



DESCRIPTION

24V 75W LED flexible strip for dry locations
 CRI 90+ Perfect light consistency with wide beam angle
 Easy to install and low maintenance
 Versatile accessories for installation
 High brightness 4.5W per foot with 7 LEDs per inch

APPLICATIONS

Cove lighting
 Path and contour marking
 DIY lights for home undercabinet and valance use
 Decorative lights for holiday, event, show, exhibition

Project: _____

Location: _____




Qty: _____

Notes: _____

SPECIFICATION (tolerance +/- 10%)				
Applications	Undercabinet, Cove, Valance, Decorative			
Color Temperature (K)	2700	3000	4000	5000
Power W/ft	4.5			
Efficiency lm/W	95	100	105	110
Lumen lm/ft	430	460	480	500
Length per roll	16.4 feet			
Total Power per roll	75 W			
Total Lumen per roll	7100	7500	7800	8200
Beam Angle	120°			
CRI	90 +			
Input	24V DC			
Dimmable	Yes			
LED Operation Type	Constant Voltage			
IP Grade	IP 20			
Approved Location	Indoor / Dry Location			
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)			
LED source	SMD 2216			
LEDs per inch	7			
Maximum Length	16.4'			
Cuttable Increment	One inch			
Adhesive Tape Type	3M 300SE			
Projected Life	70% Light Output at 20,000 Hours			
Certification	cETLus			
Warranty	3 Year			

LED Strip

Aluminum Channel (Optional)

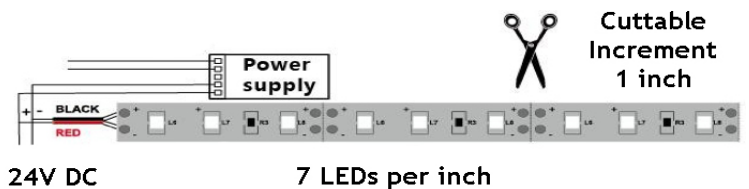

ORDERING GUIDE

2700K	DDC-H060-24V-NA-5M-27K
3000K	DDC-H060-24V-NA-5M-30K
4000K	DDC-H060-24V-NA-5M-40K
5000K	DDC-H060-24V-NA-5M-50K

ACCESSORIES

Sold Separately



Aluminum Channel With Diffused Cover
 3.3' cat # XC610



Strip Connector No Wires cat # LSC-0



Single Connector with 6" cat # LSC-1



Two Connectors with 6" Between cat # LSC-2

Note: Connectors do not fit inside the channel