

## 4" Round Deep Regressed LED 15W Open Plenum



### Type IC, Wet, Air-Tight & Open Plenum


#### DESCRIPTION

4" Round Deep Regressed LED - Elegant Design Without Glare  
Commercial Grade Quality Built To Last

#### FEATURES & BENEFITS

High Lumen Output & CRI 90+  
Type IC, Air-Tight & Wet - No Housing Required  
3 1/2" Deep - Install Where Ceiling Space Is Limited  
Armored Cable & Metal Connectors - Open Plenum Rated  
Driver Inside Connection Box with Romex Quick Connectors  
and Knock Outs - Fast Installation & No Junction Box Needed

#### 120V TRIAC Dimmable Driver Included

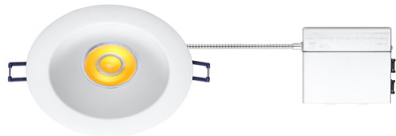


#### Optional 120V-347V Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD1535TR

#### DIMENSIONS ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

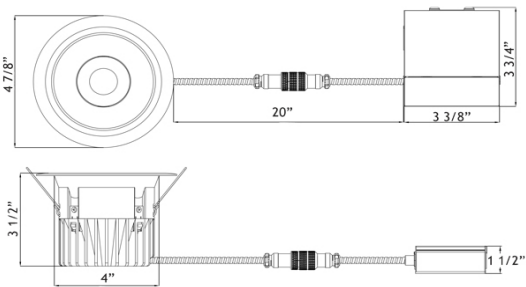

Ceiling Clearance Required: 3"

#### ORDERING GUIDE: Example LD4R-30K-4R-WR-WT

	CCT	Reflector-Trim
<b>LD4R -</b>	<b>- xxK</b>	<b>- 4R-xx-xx</b>
2700K	<b>27K</b>	<b>WR-WT</b>
3000K	<b>30K</b>	<b>SR-WT</b>
3500K (custom)	<b>35K</b>	<b>BR-WT</b>
4000K	<b>40K</b>	<b>BR-BT</b>
Dim to Warm 3000K to 2000K	<b>32K</b>	<b>SR-BT</b>

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #:

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

#### SPECIFICATION

Applications	Recessed Ceiling Mount	
Energy Used	15 W	
Color Temperature (K)	2700   3000   3500   4000	DTW 3000-2000
Light Output (lm)	1100   1200   1250   1300	900
Halogen Equivalent	110 W	
Beam Angle	25°	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Power Factor	0.98	
Approved Location	Insulated Ceilings, Open Plenum, Wet	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, Energy Star (except DTW), T24	
Warranty	10 Year on Residential 5 Year on Commercial Applications	

#### STOCK TRIMS

(Other Reflector & Trim Colors Available By Custom Order)



**White Reflector**  
**White Trim**  
**4R-WR-WT**

**Silver Reflector**  
**White Trim**  
**4R-SR-WT**

**Black Reflector**  
**White Trim**  
**4R-BR-WT**

**Black Reflector**  
**Black Trim**  
**4R-BR-BT**

**Silver Reflector**  
**Black Trim**  
**4R-SR-BT**

#### ACCESSORIES

Sold Separately



Armored Low Voltage Extension  
10ft cat # **MEC10**



Flat Rough-In Plates - cat # **RIP4**



Flanged Rough-In Plates - cat # **FRP4**



Goof Ring OD 5 3/4"  
White cat # **GR4** Black cat # **GR4-BK**

#### COMPLIANCE



**Type IC**  
**Air - Tight**  
**Open Plenum**