

Type IC, Air-Tight, Wet & Plenum

DESCRIPTION

6" Round Recessed LED With Integral Driver In Connection Box Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

2 1/4" Deep - Install Where Ceiling Space Is Limited Type IC Rated - No Housing Required CRI 90+ for True Color Rendering Fast & Easy To Install - Save On Labor Driver Inside Connection Box - No Junction Box Needed Armored Cable & Metal Connectors - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2 1/2"

DIMENSIONS: ID 6" OD 7" Cut Out 6" to 6 1/4"



120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as Cat # LLL-LD2050TR

ORDERING GUIDE Example: LL6RR - 30K - WH

	CCT	Trim Finish	
LL6RR	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K		

6" Round Regressed 2nd Gen Plenum LED 17W

LL6RR

Qty:


Project:

Location:

Cat #:

Notes:

SPECIFICATION					
Applications	Recessed Ceiling Mount				
Energy Used	17 W				
Color Temperature	2700	3000	4000		
Light Output	1150	1200	1300		
Halogen Equivalent	100 W				
Beam Angle	90°				
CRI	90 +				
Default Driver Input	120V AC	Tri	ac Dimmable		
Optional Driver Input	120V-347V AC 0-10V Dimmable		10V Dimmable		
Power Factor	0.95				
Approved Location	Insulated Ceilings, Open Plenum, Wet				
IP Rating	IP 54				
Air Tight	Yes				
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)				
Projected Life	70% Light Output at 50,000 Hours				
Certification	cULus, Energy Star, T24				
Warranty	10 Year on Residential				
vvariality	5 Year on Commercial Applications				

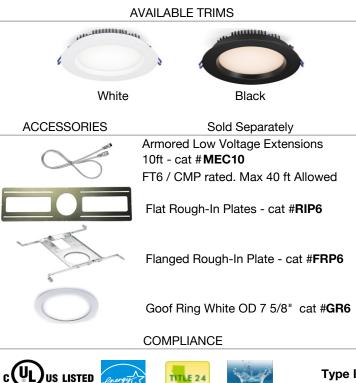



Lotus LED Lights USA

www.LotusLEDLights.com

Lotus LED Lights CANADA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WADelta BC & Mississauga ON