

LY82RCD

Qty:

4100

2400

Triac Dimmable

0-10V Dimmable

Recessed Ceiling

33 W

200 W 110°

80

0.95

Insulated Ceiling & Wet Locations

IP 54

Yes

-40°F (-40°C) to +104°F (+40°C)

70% Light Output at 50,000 Hours

cULus, Energy Star 10 Year on Residential

5 Year on Commercial Applications

Black

Low Volage Extension Cables 6ft - cat # EXC6, 20ft - cat # EXC20 Max 40 ft Allowed, FT4 / CMR rated

Flat Rough-In Plates - cat #RIP8

Goof Ring White OD 9 1/2" cat #GR8

Goof Ring White OD 10 1/2" cat #GR810

3000

2200

120V AC

AVAILABLE TRIMS

Sold Separately

120V-347V AC





Location:	

SPECIFICATION

Cat #:

Notes:

Applications

Energy Used

Colour Temperature

Light Output

Halogen Equivalent

Beam Angle

CRI

Default Driver Input

Optional Driver Input

Power Factor

Approved Location

IP Rating

Air Tight

Ambient Temperature

Projected Life

Certification

Warranty

ACCESSORIES

White

Type IC, Wet & Air-Tight

DESCRIPTION 8" Round Recessed LED With Integral **Driver In Connection Box**


FEATURES & BENEFITS

1 3/4" Deep - Install Where Ceiling Space Is Limited Driver Inside Connection Box - No Junction Box Needed Fast & Easy To Install - Save On Labor Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 1 3/4"


DIMENSIONS: ID 7 1/4" OD 9" Cut Out 7 1/2" to 8"

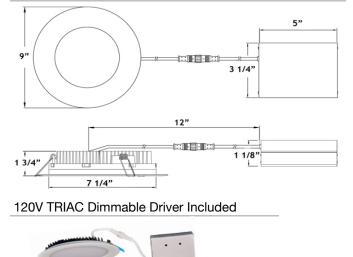

Optional 120V - 347V Driver 0-10V Dimmable



Order Separately as Cat # LLL-LD3580T



WH White BK Black

COMPLIANCE



3	you
R	WET LOCAT



Air-Tight

Lotus LED Lights USA

30K

41K

3000K

4100K

www.LotusLEDLights.com

Lotus LED Lights CANADA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500 800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090 Warehouse Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA Delta BC & Mississauga ON