


LEDAT19-8W / 30K AND 40K




TECHNICAL SPECIFICATIONS

- 8 WATTS
- 120 VOLTS
- 800 LUMENS
- Degrees Kelvin: 3000K / 4000K
- CRI: 80
- Bulb color: Clear

DIMENSIONS

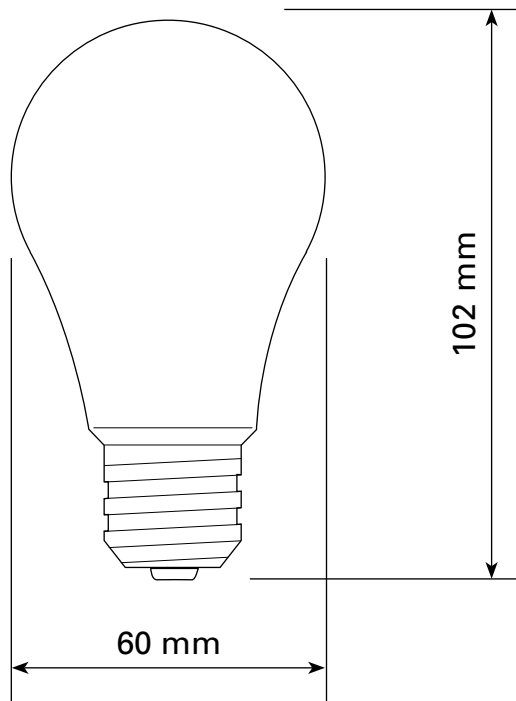

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

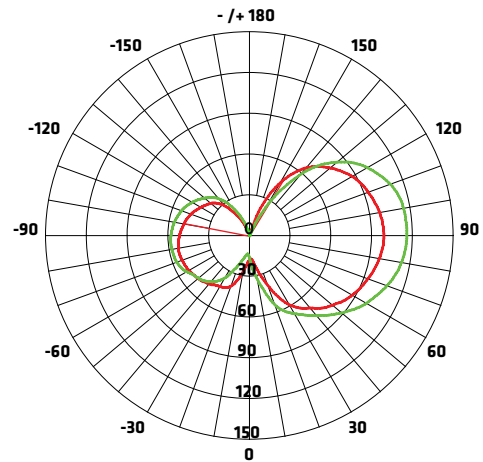

AVERAGE BEAM ANGLE (50%): 282.3°
Unit: CD — C0/180,248.8° — C90/270,315.7°

FIGURE AAI

Flux out: 92.41 lm

Height	E avg	E max	Diameter
1 m	29.42	48.32 Lx	200.00 cm
2 m	7.354	12.08 Lx	400.00 cm
3 m	3.268	5.369 Lx	600.00 cm
4 m	1.838	3.020 Lx	800.00 cm
5 m	1.177	1.933 Lx	1000.00 cm
6 m	0.8171	1.342 Lx	1200.00 cm
7 m	0.6003	0.9861 Lx	1400.00 cm
8 m	0.4596	0.7550 Lx	1600.00 cm
9 m	0.3632	0.5965 Lx	1800.00 cm
10 m	0.2942	0.4832 Lx	2000.00 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Angle: 90.00 deg

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).

CLIENT:
PROJECT:
DATE: