

G9 LED BULBS

3 YEARS WARRANTY



For LEDG9-4.5W-30K only

DIMMABLE


LEDG9-4.5W / 30K AND 40K




TECHNICAL SPECIFICATIONS

- 4.5 WATTS (Equivalent to 50W)
- Degrees Kelvin: 3000K / 4000K
- 120 VOLTS
- CRI: 80
- 400 LUMENS
- Bulb color: White

DIMENSIONS

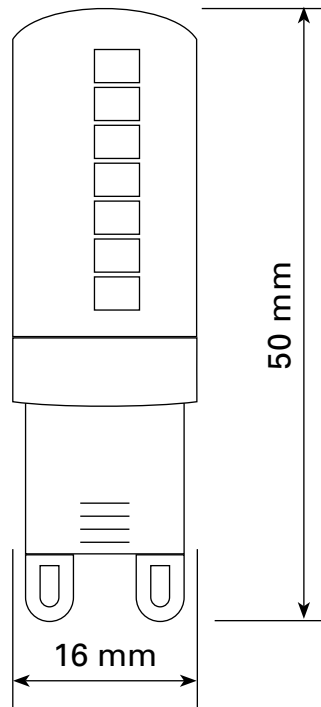

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

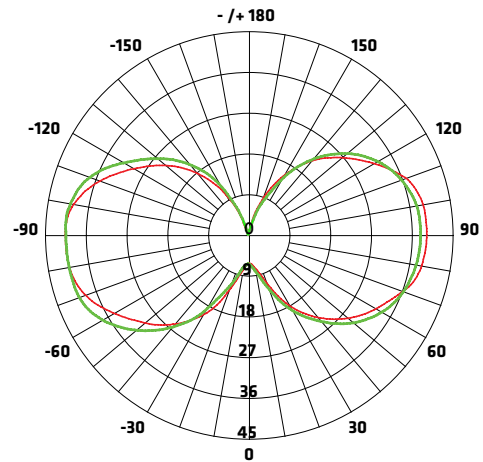

AVERAGE BEAM ANGLE (50%): 322.0°

Unit: CD — C0/180,322.3° — C90/270,321.6°

FIGURE AAI

Flux out: 35.01 lm

Height	E avg	E max	Angle: 90.00 deg	Diameter
1 m	11.15	13.83 Lx		200.00 cm
2 m	2.786	3.458 Lx		400.00 cm
3 m	1.238	1.537 Lx		600.00 cm
4 m	0.6966	0.8646 Lx		800.00 cm
5 m	0.4458	0.5533 Lx		1000.00 cm
6 m	0.3096	0.3842 Lx		1200.00 cm
7 m	0.2275	0.2823 Lx		1400.00 cm
8 m	0.1741	0.2161 Lx		1600.00 cm
9 m	0.1376	0.1708 Lx		1800.00 cm
10 m	0.1115	0.1383 Lx		2000.00 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

While our LED bulbs function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED bulbs, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 15 8-Watt PAR20 bulbs (total 120 Watts).



4300 Grande-Allée Blvd, Boisbriand
QC, Canada J7H 1M9

450 979-0667
info@lumifaro.com
www.lumifaro.com

CLIENT:
PROJECT:
DATE: