














PROJECT NAME:	CAT. #:
NOTES:	FIXTURE SCHEDULE:

Linear Light Engine Retrofit Kit

LELK Gen 4 series

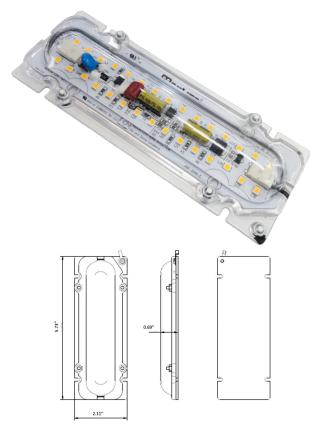

5.5" Linear light engine(inch)

FEATURES:

- Integral driver-on-board, connects directly to 120VAC
- Dimmable to 10% with standard forward phase cut dimmers
- Low flicker technology
- Integral push-in quick connectors on each end allow linkable end-to-end daisy-chain connections for customizable longer lengths (5.5" max 8pcs, 11.5" max 4pcs)
- Optional magnetic mounting bracket

LISTINGS:

- ENERGY STAR® Certified
- Supports Compliance of JA8-2016-E
- The retrofit kits are UL Classified for new luminaires designs or field retrofits
- The light engines and accessories are UL recognized components only. The customer is required to include those in the safety certification files for the product it will be used for.

CONSTRUCTION:

 Retrofit kits are ready for field usage and include a steel heat sink, UL 5VA rated plastic isolation barrier and an LED engine with metal core board

EQUIVALENCIES:

• 10LELK5.5B9XX/G2 = 640 lm approx. 60W INC/ 13W CFL

APPLICATIONS:

- Wall mount luminaires
- · Surface mount luminaires
- Linear pendants
- · Cove and channel lighting
- Troffers

Ordering Information

WATTAGE + FAMILY	LENGTH	CRI	сст	LENS TYPE	GENERATION
10LELK= 10W Linkable Linear Retrofit Kit	5.5= 5.5 inches	9= 90	27= 2700K 30= 3000K	[BLANK]= Clear F= Frosted ¹	/G2= Gen 2

¹ Made to order

Stocked Items

MODEL NUMBER	ORDER CODE	ENERGY STAR ID	ITEM DESCRIPTION	ССТ
10LELK5.5B927/G2	108825	24000482	10W LINKABLE LINEAR RETROFIT KIT 5.5" 90 CRI 2700K CLEAR GEN 2	2700K
10LELK5.5B930/G2	108826	24000482	10W LINKABLE LINEAR RETROFIT KIT 5.5" 90 CRI 3000K CLEAR GEN 2	3000K



5-year standard warranty (further details available at www.maxlite.com/warranties)

Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.















Linear Light Engine Retrofit Kit

LELK Gen 4 series

Compatible Dimmers

MAKE	DIMMER MODEL	MAKE	DIMMER MODEL
LEVITON	IPI06	LUTRON	DV-603P, S-600P, SCL-153P , DVCL-153P , TGCL-153P

Specifications	10W 5.5" Clear	10W 5.5" Frosted
Power Consumption	10W	
Lumens Delivered	640 lm	
Efficacy	64.0	
CRI	≥90	
Incandescent Equivalent	60W Inc.	
Color Temperature (K)	2700K, 3000K	
L70 Lifetime (hours)	50,000 Hrs	
тс	205.7° F (96.5°C)	
Color Consistency	SDCM < 4	
Power Factor	>0.9	
Input Voltage	120V	
Compatible Dimmers	See Compatible dimmer list	
Weight	0.340 lbs.	
Operating Temperature	-4°F to 104°F	
Certification	ENERGY STAR, cULus Classified, RoHS	
Material Usage	RoHS Compliant	
Environment	Dry, Damp	
Warranty	5 year standard warranty	

Phone: 1-800-555-5629 Fax: 973-244-7333 Web: www.maxlite.com E-mail: info@maxlite.com PLM LTE4-1 Rev: 09/08/21