


Version	2.0	Date	2/12/24
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Linear Architectural Light
Item Number	9551
Stock Code	FXLAL30SW/24FR/8CCT5/BK/347
Mounting	Pendant Mount/ Ceiling Mount/ Wall Mount/Recessed Mount
Housing Color	Black

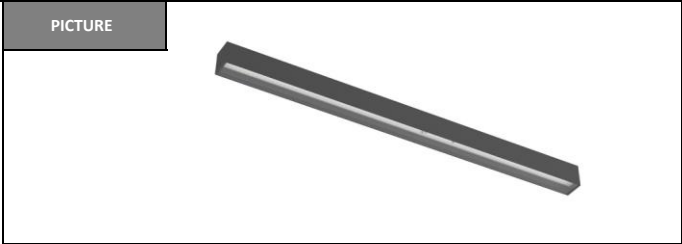

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	15/20/24/27/30	Replacement Wattage (W)	90-100
Tested Wattage (W)	15/20/24/27/30		
Input Voltage (V)	120-347V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.27	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%	Photocell	-

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	15W: 1,890 20W: 2,520 24W: 3,024 27W: 3,402 30W: 3,780	CCT (K)	5CCT (3000/3500/4000/5000/6500K)
		Beam Angle (°)	110°
Efficacy (lm/w)	3000K:126lm/W 3500K:133lm/W 4000K:137lm/W 5000K:137lm/W 6500K:131lm/W		
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP20
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7336	BAEM4-60BC/MV-A	4W Emergency Driver 120-277V
P10550	LM-2.5LAL/24/BK	2-ft Uplight Bar 8CCT5 - Black
P10438	SEN-HB001VCR-1	12V Motion Sensor 0-10V Dimming
P10547	CNTR-2.5LAL/KIT	Linkable Connector Kit
P10555	CNTR-2.5LAL/L/BK	L Shape Linear Architectural Light 8CCT5-Black
P10556	CNTR-2.5LAL/T/BK	T Shape Linear Architectural Light 8CCT5-Black
P10557	CNTR-2.5LAL/X/BK	X Shape Linear Architectural Light 8CCT5-Black

PRODUCT DIMENSIONS		
Length- in / (mm)	25.15" 639	
Height- in / (mm)	3.14" 80	
Width- in / (mm)	2.55" 65	
EPA (ft²)	-	
Weight (lbs)	1.98	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS