


Project	
Schedule	Date
Notes	

DESCRIPTION

naturalLED[®] CSL provides the perfect solution for your lighting needs. The LED commercial strip light maximizes energy savings and is designed for multiple applications including new construction. This fixture can be used for warehouse, parking garages, stairwells, offices, hallways and many other applications in industrial and commercial. Types of installation include ceiling, wall, chain or cable mounting. Our commercial strip light is very versatile, efficient and is available up to 10,000 Lm, with option and availability for pre-installed Bi-level motion sensor.

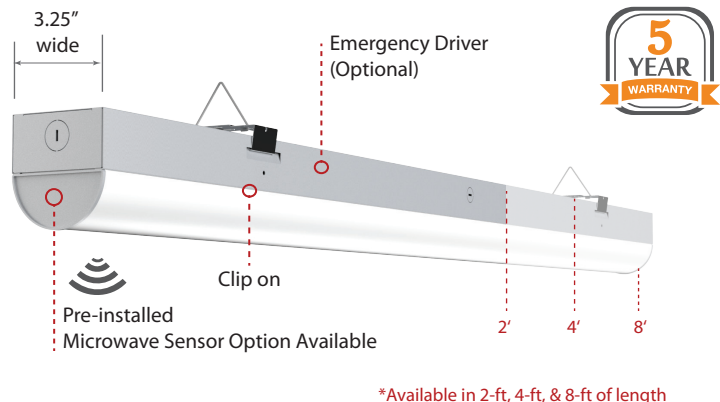

*Available in 2-ft, 4-ft, & 8-ft of length



FEATURES

- DLC Premium
- Suitable for damp location
- Easy installation clip on
- Material: Steel and PC lens
- Available in 2', 4' or 8' length
- Microwave motion sensor available
- Input line voltage: 120-277V
- Input current: 0.17A
- Power Factor: >0.9
- Dimmable: 0-10V
- CRI: 80
- THD<20
- Surge protect level: 4KV
- Operating temperature: -22°F - 122°F

ACCESSORIES

- Emergency Driver
- Motion/Daylight Sensor
- 347-480V to 277 Step Down Driver
- Wireguard

APPLICATIONS

- Warehouse Lighting
- Retail Lighting
- Parking Garage
- Stairwells and Hallways
- Storage Lighting

WARRANTY

- 5 Year Warranty


Ordering Information		EXAMPLE: LED-FXCSL35/48FR/840/MV-SEN					
LED	FX	CSL	35	48FR	840	MV	SEN
LED	Category FX Fixture	Series CSL Commercial Strip Light	Wattage 35 35W	Size/ Lens 48 48inch FR Frosted	CCT 840 4000K	Voltage MV 120-277V Multiple Voltage	Accessory SEN Sensor

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Rated Hrs	DAMP LOCATION	DLC (S/P)
35	9344	LED-FXCSSL35/48FR/840/MV-SEN	4000K	5,412	3x 32W T8	3.25"x48"	50,000	•	P
35	9345	LED-FXCSSL35/48FR/850/MV-SEN	5000K	5,472	3x 32W T8	3.25"x48"	50,000	•	P
20	9259	LED-FXCSSL20/24FR/840/MV	4000K	3,285	3x 17W T8	3.25"x24"	50,000	•	P
20	9260	LED-FXCSSL20/24FR/850/MV	5000K	3,357	3x 17W T8	3.25"x24"	50,000	•	P
25	9261	LED-FXCSSL25/48FR/840/MV	4000K	3,958	2x 32W T8	3.25"x48"	50,000	•	P
25	9262	LED-FXCSSL25/48FR/850/MV	5000K	4,007	2x 32W T8	3.25"x48"	50,000	•	P
35	9263	LED-FXCSSL35/48FR/840/MV	4000K	5,412	3x 32W T8	3.25"x48"	50,000	•	P
35	9264	LED-FXCSSL35/48FR/850/MV	5000K	5,472	3x 32W T8	3.25"x48"	50,000	•	P
42	9265	LED-FXCSSL42/96FR/840/MV	4000K	6,666	4x 32W T8	3.25"x96"	50,000	•	P
42	9266	LED-FXCSSL42/96FR/850/MV	5000K	6,797	4x 32W T8	3.25"x96"	50,000	•	P
56	9267	LED-FXCSSL56/96FR/840/MV	4000K	8,600	5x 32W T8	3.25"x96"	50,000	•	P
56	9268	LED-FXCSSL56/96FR/850/MV	5000K	8,661	5x 32W T8	3.25"x96"	50,000	•	P
68	9350	LED-FXCSSL68/96FR/840/MV	4000K	10,644	6x 32W T8	3.25"x96"	50,000	•	P
68	9351	LED-FXCSSL68/96FR/850/MV	5000K	10,749	6x 32W T8	3.25"x96"	50,000	•	P

SPECIFICATIONS

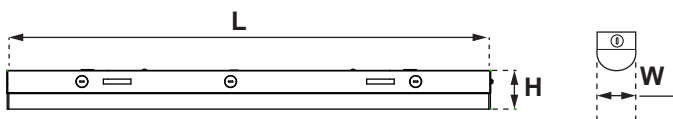

Size	Length (L)	Width (W)	Height(H)
2 ft	24" (609mm)	3.25" (83mm)	3.31" (84mm)
4 ft	48" (1219mm)	3.25" (83mm)	3.31" (84mm)
8 ft	96" (2440mm)	3.25" (83mm)	3.31" (84mm)

MOUNTING / ACCESSORIES

SOLD SEPARATELY

Emergency Driver

- 7334 BAEM15-48BC/MV-A (LED Emergency Backup Driver 120-277V)



Motion/Daylight Sensor

- P10234 SEN-MC605V-D (Built-In Motion Sensor MV605V D 120-277V)



Wireguard


- P10250 WG-CSL/24/WH (Wireguard for 2ft)
- P10251 WG-CSL/48/WH (Wireguard for 4ft)*



*8-ft strip light requires two P10251 WG-CSL/48/WH

Step Down Driver

- P10182 BA-10031A-240-22 (347-480V to 277V Step Down Driver)




MOUNTINGS



PHOTOMETRICS CHART


FXCSL (2')- 20 Watt
DLC Premium

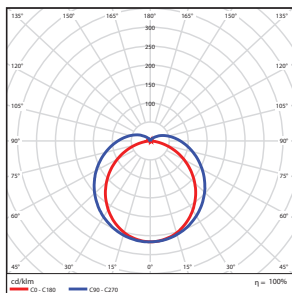

	Illuminance at a Distance	
	Center Beam fc	Beam Width
2.5ft	134 fc	6.8 ft 14.1 ft
5.0ft	33.6 fc	13.5 ft 28.2 ft
7.5ft	14.9 fc	20.3 ft 42.3 ft
10.0ft	8.40 fc	27.1 ft 56.4 ft
12.5ft	5.37 fc	33.9 ft 70.5 ft
15.0ft	3.73 fc	40.6 ft 84.6 ft

■ Vert. Spread: 107.1°
■ Horiz. Spread: 141.0°


FXCSL (4')- 25 Watt
DLC Premium

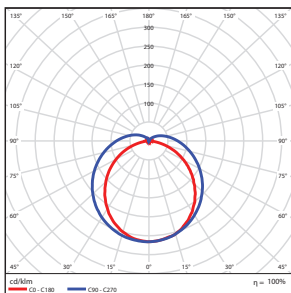

	Illuminance at a Distance	
	Center Beam fc	Beam Width
2.5ft	168 fc	6.8 ft 13.6 ft
5.0ft	42.1 fc	13.7 ft 27.2 ft
7.5ft	18.7 fc	20.5 ft 40.9 ft
10.0ft	10.5 fc	27.4 ft 54.5 ft
12.5ft	6.73 fc	34.2 ft 68.1 ft
15.0ft	4.68 fc	41.1 ft 81.7 ft

■ Vert. Spread: 107.7°
■ Horiz. Spread: 139.7°

FXCSL (8')- 35 Watt
DLC Premium

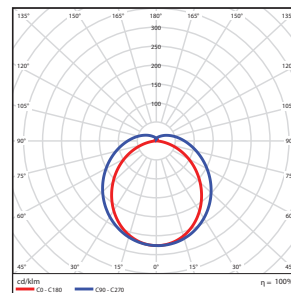

	Illuminance at a Distance	
	Center Beam fc	Beam Width
2.5ft	232 fc	6.8 ft 13.4 ft
5.0ft	58.1 fc	13.5 ft 26.9 ft
7.5ft	25.8 fc	20.3 ft 40.3 ft
10.0ft	14.5 fc	27.1 ft 53.7 ft
12.5ft	9.29 fc	33.9 ft 67.2 ft
15.0ft	6.45 fc	40.6 ft 80.6 ft

■ Vert. Spread: 107.1°
■ Horiz. Spread: 139.2°

PACKAGE

Master Pack: 1

