

## LED FLUSH MOUNTS

FM1-5-5CCT | FM1-7-5CCT | FM1-9-5CCT | FM1-12-5CCT


### HIGHLIGHTS

#### 5", 7", 9" and 12" Flush Mounts With Adjustable CCT

- Edge-lit technology, no glare or dark spots, instant-on
- This 0.7" thick luminaire is easy to install on standard J-boxes with mounting bracket
- Construction: PC lamp body with white translucent acrylic lens
- Triac Dimmable, Certified airtight, IC rated
- CCT selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Rated for long life - over 50,000 hours



### DIMENSIONS

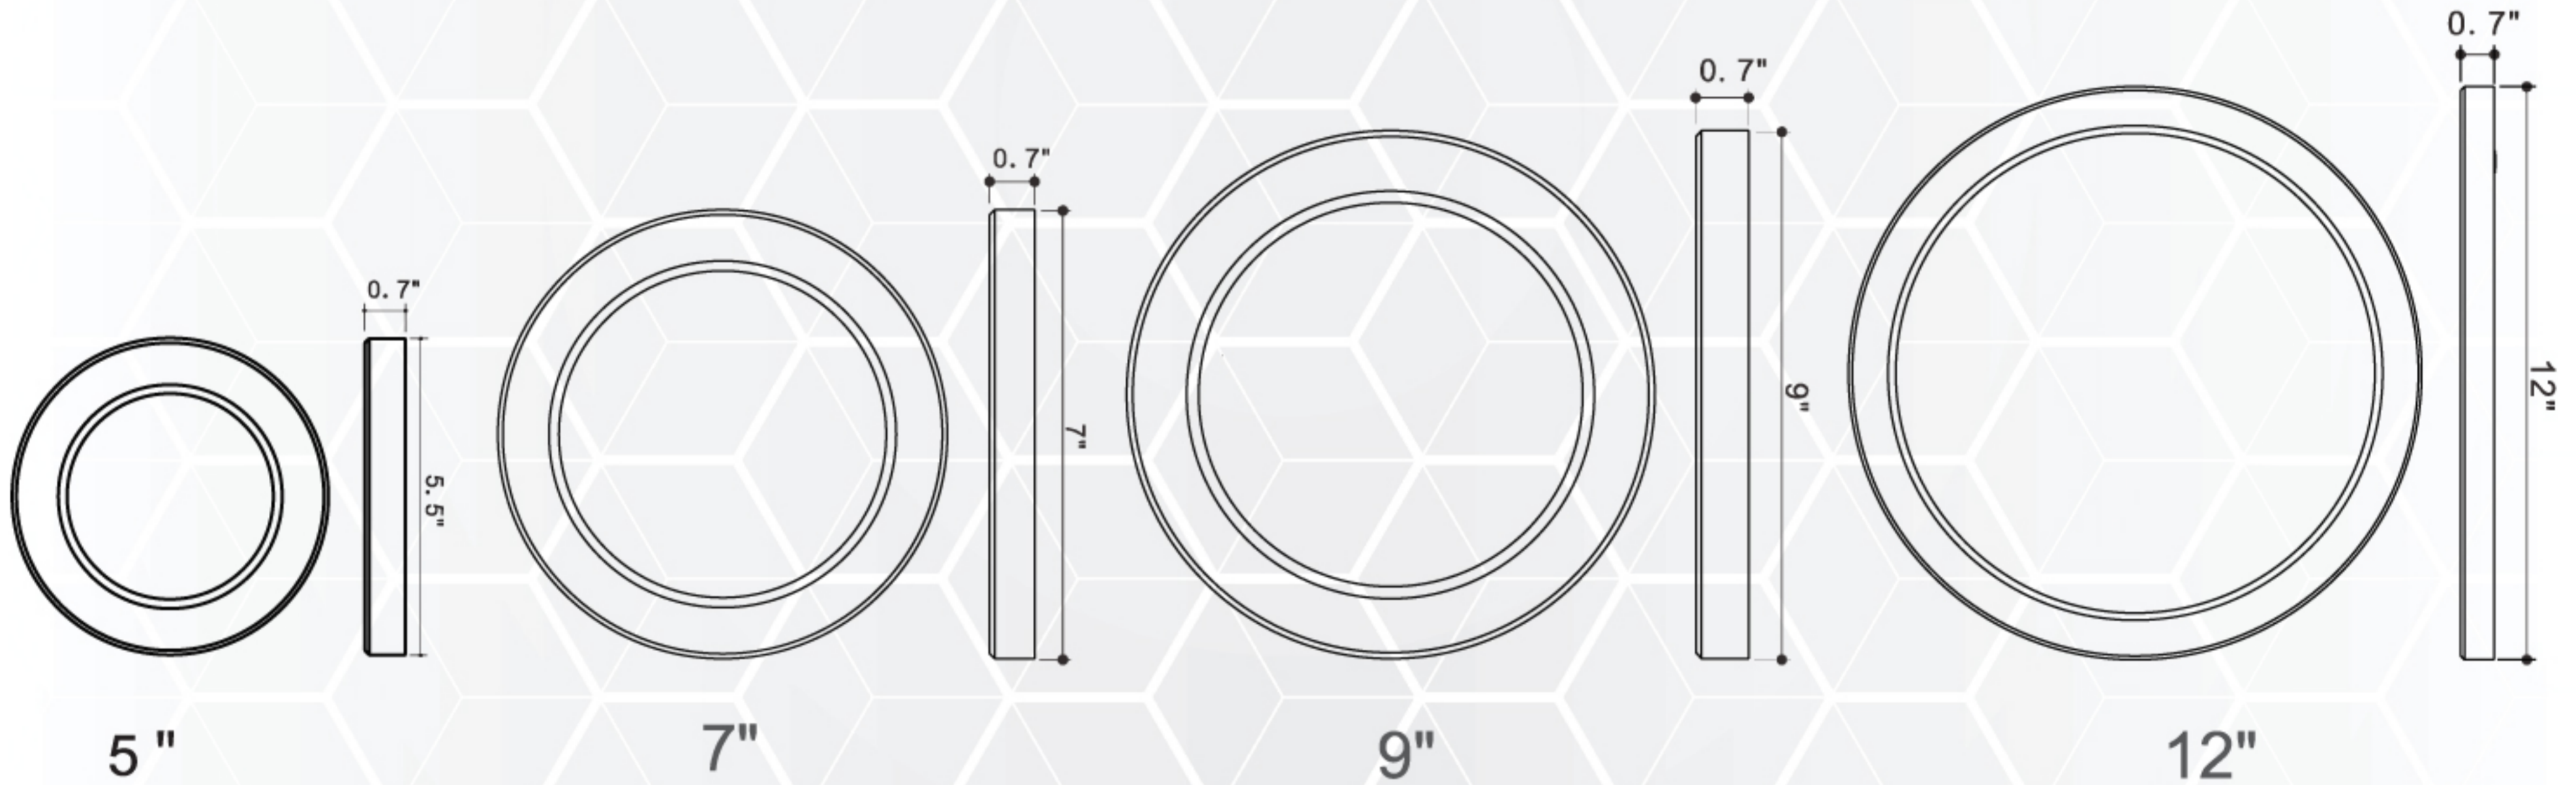

### SPECIFICATIONS

Model	FM1-5-5CCT	FM1-7-5CCT	FM1-9-5CCT	FM1-12-5CCT
Wattage	9W	15W	18W	23W
Voltage	AC120V, 60Hz			
Lumens	600lm	1000lm	1400lm	1950lm
Beam Angle	110°			
Lifetime	50000 hours			
Air Tight	Yes			
Rating	IC rated   Wet location   Indoor use			
Grade of Protection	IP54			
CRI	80Ra+			
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K			
Dimming	Triac Dimming			
Application	Corridors / Lobbies / Kitchens / Bathrooms / Bedrooms			
Operating Temp.	-20°C ~ +40°C			




## LED FLUSH MOUNTS

FM1-5-5CCT | FM1-7-5CCT | FM1-9-5CCT | FM1-12-5CCT

### INSTALLATION

3" & 4" J-Box  
(5" & 7" & 9")

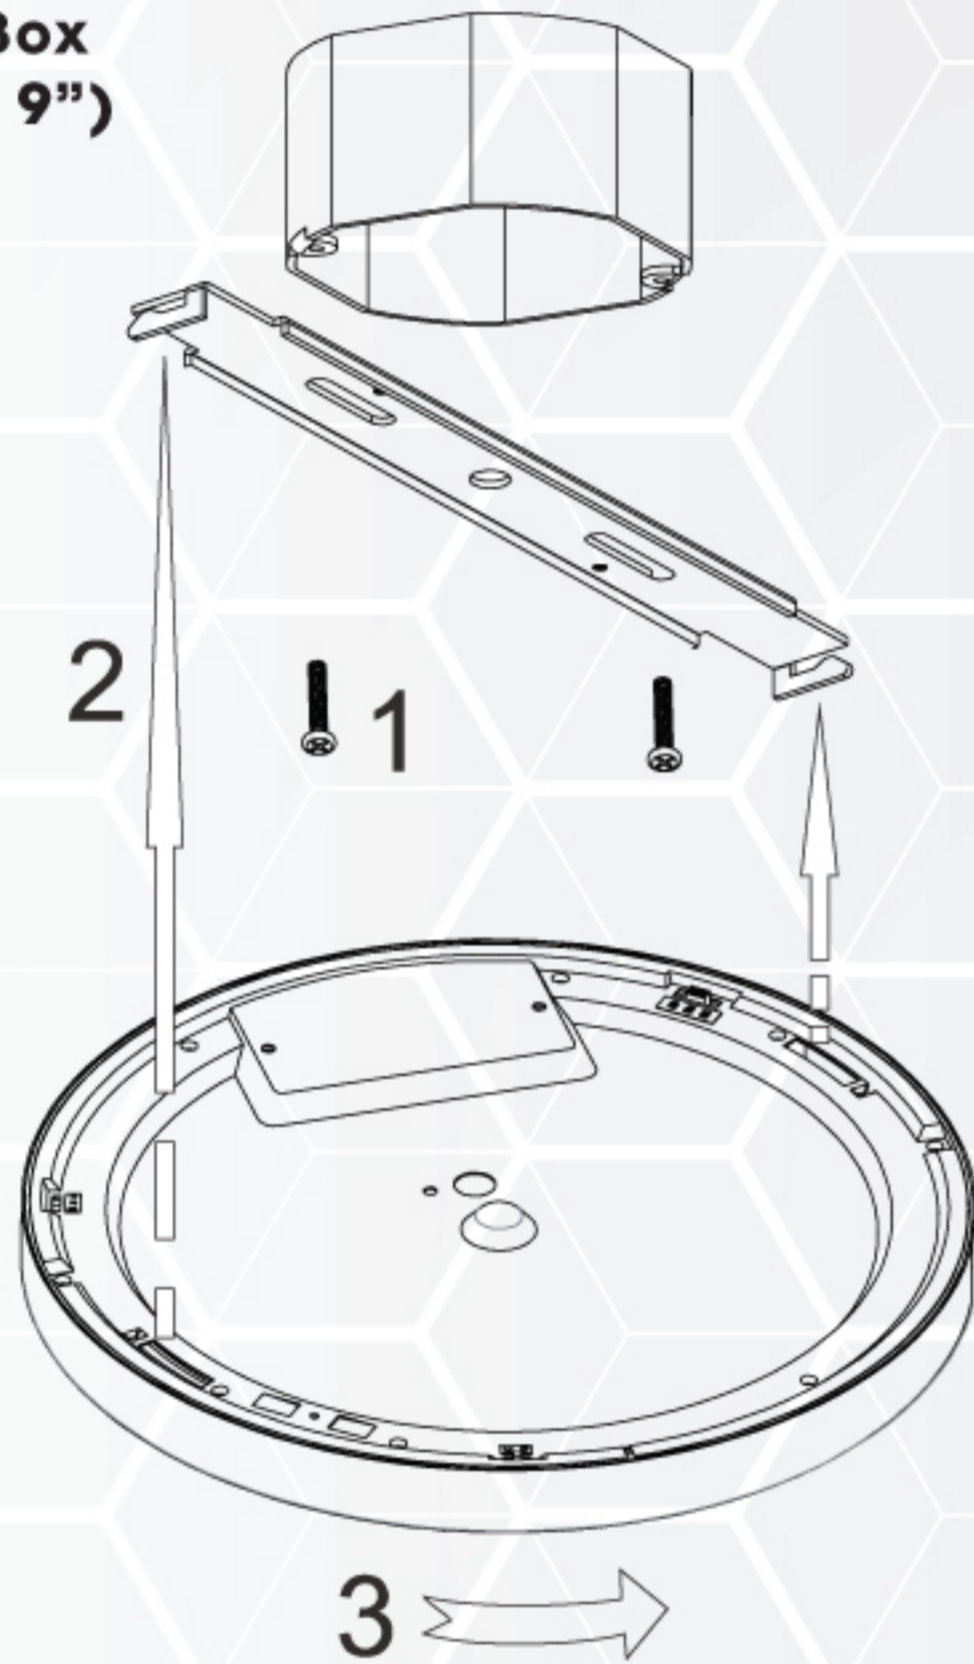

### INCLUDED IN BOX

- 5" & 7" & 9" Plastic Round Slim Surface
- Two Mounting Screws
- Three Wire Nuts
- 1 mounting bracket



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.