

MODEL PUK SLIM



HIGHLIGHTS

- LED recessed mount puk light that provides an even warm light that delivers enough illumination for any work surface or display
- Offers task or accent illumination in residential and commercial indoor applications and can be surface mounted or recessed
- Has PC (polycarbonate) polymeric resin body, and the light's opal glass shield provides evenly distributed lighting
- Consumes less energy than their halogen equivalent, and is dimmable when used with a dimming driver

SPECIFICATIONS

Model	PUK SLIM
Wattage	1.5W
Voltage	12V DC
Lumens	100 lmn
Beam Angle	120°
Lifetime	50000 hours
CRI	80
Dimmable	Yes
Rating	Non-IC Rated / Indoor use / for Damp locations
Grade of Protection	IP 42
Applications	Under cabinet / Home / Office / Kitchen / Workshop
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C
Compatible Drivers	OT-08D / OT-15D / OT-24D / OT-60D / OT-96
Warranty	5 years

Available in following colours:





PUK SLIM WH
(White)



PUK SLIM SN
(Satin Nickel)

MODEL PUK SLIM

DIMENSIONS

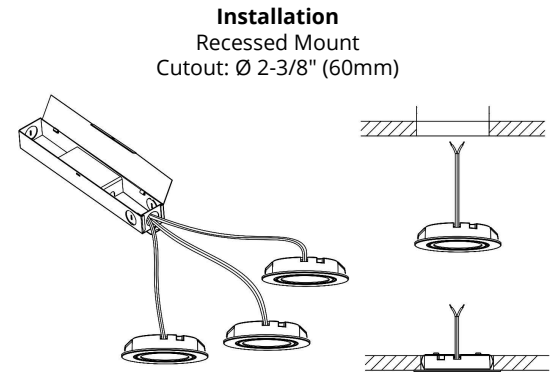

FEATURES

PUK SLIM can be surface mounted or recessed

- Surface mounting can be achieved with the included mounting ring (mounting hardware included)
- Recessed mounting is achieved with pressure clips provided on the puk light

Compatible Drivers (sold separately)



OT-08D

Max. 8W
Class 2 Driver



OT-15D

Max. 15W
Class 2 Driver



OT-24D

Max. 24W
Class 2 Driver



OT-60D

Max. 60W
Class 2 Driver



OT-96

Max. 96W
Class 2 Driver

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: