

LED UFO High Bays

MODEL UFO-150-3CCT+W | UFO-240-3CCT+W

ORTECH

Product Specification Sheet



HIGHLIGHTS

Watts and CCT Selectable UFO High Bay


- Simple and stylish appearance
- Excellent heat dissipation
- DLC 5.1 Premium with high luminous efficacy and low UGR
- PnP sensor option
- Round EM driver for fast installation
- Complete selection of accessories available
- 3CCT (3500K-4000K-5000K)
- Mounting options: hook/chain, pole pendent and surface mounting

SPECIFICATIONS


Model	UFO-150-3CCT+W	UFO-240-3CCT+W
Wattage	100W/125W/150W	150W/200W/240W
Voltage	AC 120-347V	
Beam Angle	110°	
Lifetime	≥50000 hours	
Lighting Efficiency	135LM/W	
CRI	Ra>80	
Location	Wet Location	
Colour Temp.	3500K 4000K 5000K	
Lumens	20,250lmn	32,400lmn
Operating Temp.	-40°C~45°C	
Warranty	5 years	

DIMENSIONS

UFO-150-3CCT+W

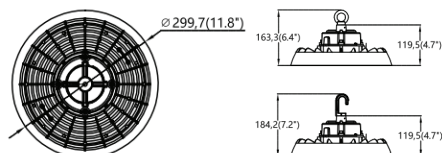


UFO-240-3CCT+W

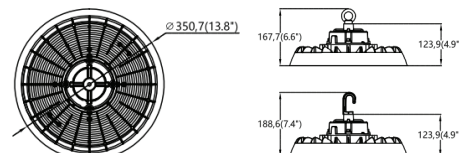


WATTS & CCT SELECTABLE


1.Remove the rubber pad from the drive

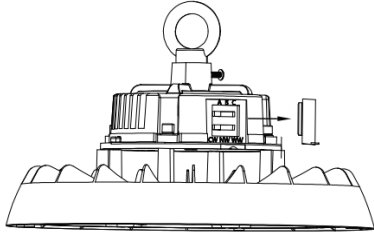

2.Use the slide switch to select wattage & CCT

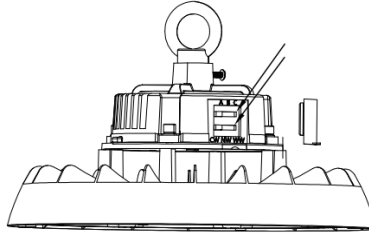


3.Attach the rubber pad to the drive

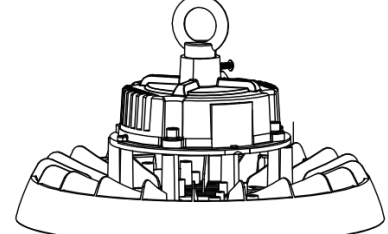


INSTALLATION

1.Rings type:


1.Tighten the ring clockwise

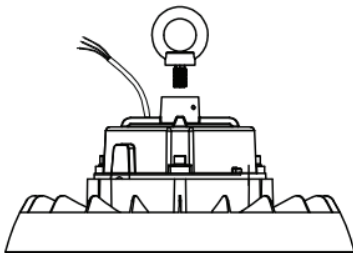

2.Tighten the screw

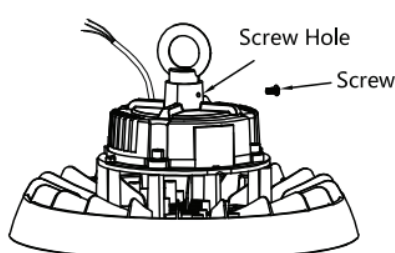


3.Hang the light

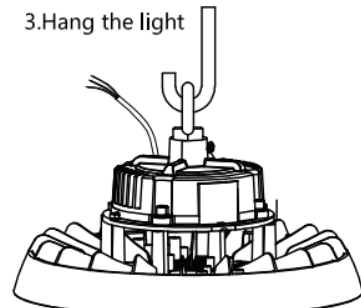


2.Hook type:


1.Tighten the hook clockwise




2.Tighten the screw



3.Hang the light



4.Tighten the screw



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.