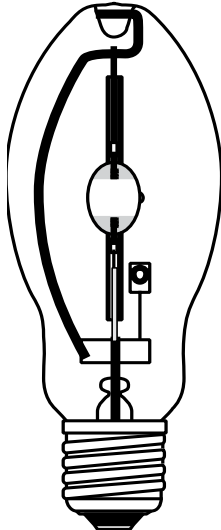


MS200/ED17/PS/U/4K

Order Code	1669	
ANSI Designation	M136/E	
Performance Data		
Light Output (Lumens 100 Hrs)	19000	
Lamp Lumens Per Watt	95	
Mean Output (Lumens)	13500	
Rated Life (Hrs 10 Hr 1 Strat)	15000	
Color Temperature (k)	4200K	
Chromaticity (CIE-x/y)	0.380, 0.377	
Color Rendering Index (CRI)	65	
To 90% Warm Up Time (Minute)	4	ED17
Hot Restart Time (Minute)	3-5	
Burning Position	Universal	
Physical Data / Requirement		
Base Designation	E26	
Bulb Designation	ED17	
Bulb Diameter (in)	φ2.16	
Max Overall Length (MOL) inches	5.44	
Light Center Length (LCL) inches	3.38	
Max Base Temperature (°F)	410	
Max Bulb Temperature (°F)	842	
Luminaire type	ENCLOSED	
Socket Pulse Rating (KV)	3000-4000V	
Socket Style	Medium (E26)	
Electrical Data / Requirement		
Lamp Warrage (W)	200W	
Operating Voltage (V)	132V	
Operating Current (Amps)	1.60A	
Min.Open Circuit Voltage (RMS)	310V	
Min. Max Starting Pulse (Peak V)	3000-4000	
Min Pulse Width (u sec)	1	
Min Pulse Rate Per 1/2 Cycle	1	
Pulse Position (Min.% OCV Peak)	60°~90°	

Warning: This lamp can cause skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used, lamps that will automatical extinguish when outer envelope is broken or punctures are commercially available.