



Available in 32W / 46W / 65W

4 Foot & 8 Foot Lengths

NSF Certified & DLC Listed

IP66, NEMA 4x, IK10

4000K & 5000K



VP2 Series Vapor Proof Linear Fixtures




The VP2 Series Vapor Proof Linear Fixture is a dependable, energy efficient luminaire designed to be used in environments subject to high levels of moisture and dust.

Its non-discoloring opal polycarbonate diffuser provides high efficacy, even light that is soft and comfortable, making it the ideal fixture for any application.

Key Features & Benefits

- High efficacy, up to 140 lumens/W
- Choice of 4000K or 5000K
- Multiple knockouts make installation flexible and easy
- IP66 and NEMA 4x rated
- IK10 rated for protection against impact
- NSF/ANSI 2 certified
- 0-10V dimmable
- Available in 4 foot or 8 foot lengths
- Includes a 6 foot cord for quick and convenient installs
- Up to 82 CRI provides better color rendering of objects
- Designed to work in -40°C / -40°F degree environments
- Backed by a worry-free 10 year warranty

WHY CHOOSE THIS FIXTURE?

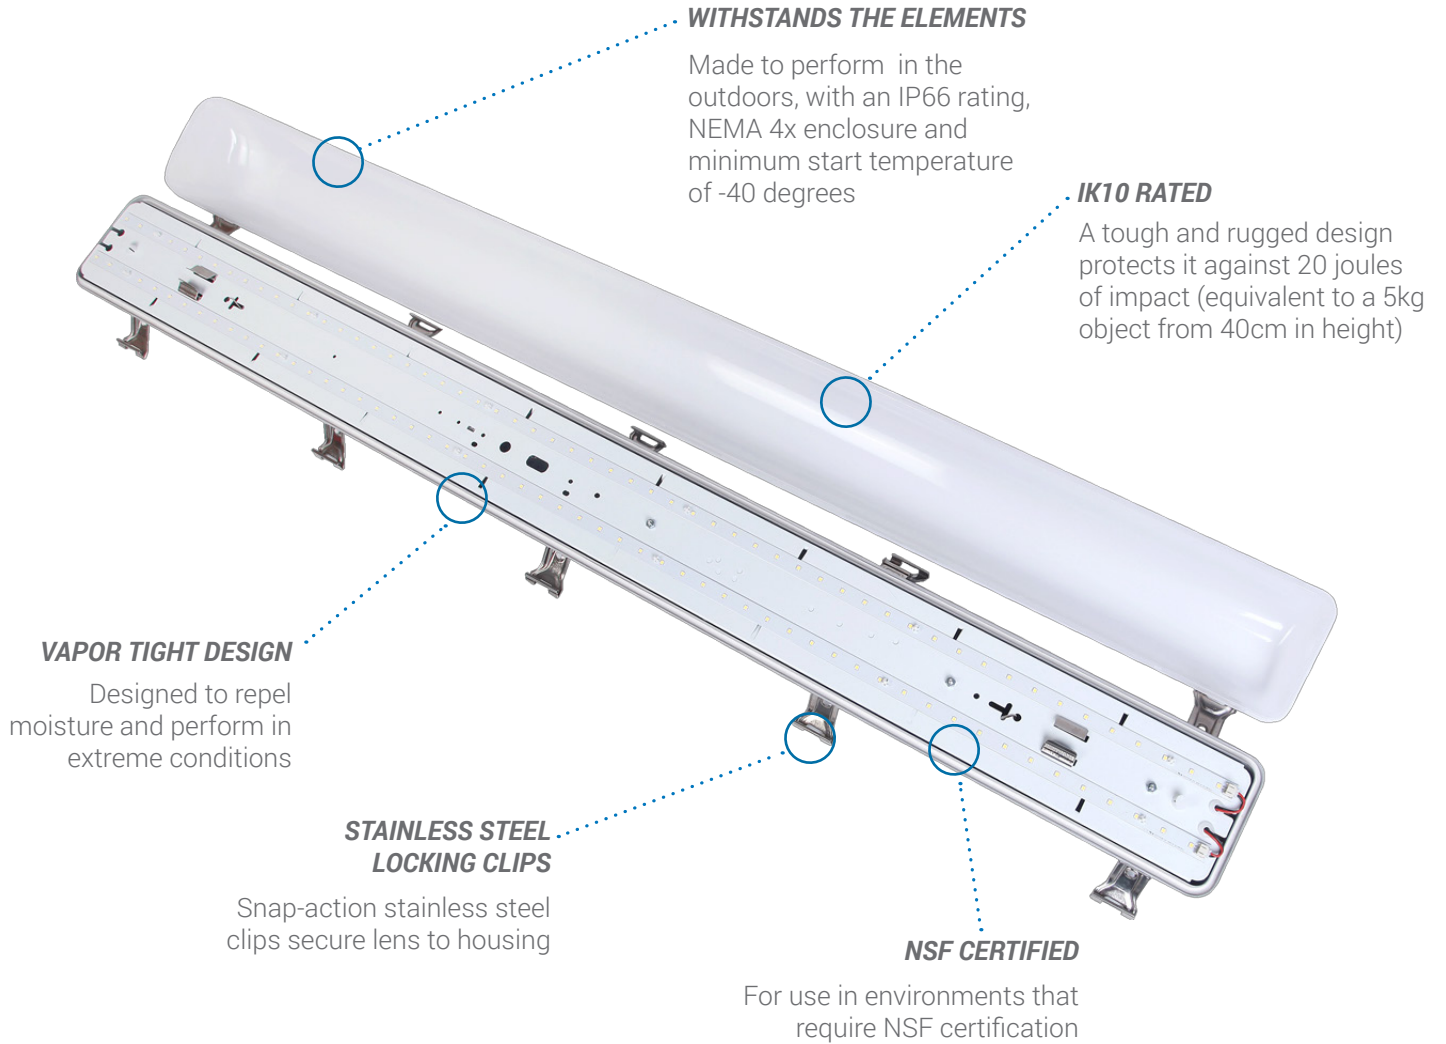

WITHSTANDS THE ELEMENTS

Made to perform in the outdoors, with an IP66 rating, NEMA 4x enclosure and minimum start temperature of -40 degrees

IK10 RATED

A tough and rugged design protects it against 20 joules of impact (equivalent to a 5kg object from 40cm in height)

VAPOR TIGHT DESIGN

Designed to repel moisture and perform in extreme conditions

STAINLESS STEEL LOCKING CLIPS

Snap-action stainless steel clips secure lens to housing

NSF CERTIFIED

For use in environments that require NSF certification

Available Models

MODEL#	VOLTAGE	WATTAGE	LUMENS	CRI	CCT	LENGTH	FEATURES
VP2-4324-3	120-347V	32W	3,986 lm	80+	4000K	4FT	0-10V Dimmable IP66 Rated Wet Location Rated DLC Premium NEMA 4x IK10 NSF Rated
VP2-4325-3		32W	4,054 lm		5000K	4FT	
VP2-4464-3		46W	5,902 lm		4000K	4FT	
VP2-4465-3		46W	6,002 lm		5000K	4FT	
VP2-4654-3		65W	8,558 lm		4000K	4FT	
VP2-4655-3		65W	8,365 lm		5000K	4FT	
VP2-8654-3		65W	9,342 lm		4000K	8FT	
VP2-8655-3		65W	9,320 lm		5000K	8FT	

Specifications and dimensions subject to change without notice.

Adders & Options

Cord Adders

W183xx	300V White Cord, specify length
W186xx	600V White Cord, specify length

Cord End Adders

N01	5-15P 125V 15A Straight Plug
N02	6-15P 250V 15A Straight Plug
N04	L5-15P 125V 15A Locking Plug
N05	L6-15P 250V 15A Locking Plug
N06	L7-15P 277V 15A Locking Plug
N07	5-20P 125V 20A Straight Plug
N08	6-20P 250V 20A Straight Plug
N09	7-20P 277V 20A Straight Plug
N10	L5-20P 125V 20A Locking Plug
N11	L6-20P 250V 20A Locking Plug
N12	L7-20P 277V 20A Locking Plug
N13	L24-20P 347V 20A Locking Plug

Motion Sensor Adders

M4	Microwave Sensor 120-277V (not compatible with 8 foot models)
M5	Microwave Sensor 347-480V (not compatible with 8 foot models)
M8	Behind the Lens Microwave Motion Sensor 120-277V