



RHB2R-LED240

LED Round Highbay



SPECIFICATIONS*

Watts	237.9
Lumens	31480.3
Efficacy	133.8
Replaces Up To	750W MH
Colour Temp	4000K*, 5000K
Certification	ETL, IP65, DLC
Operating Temp	-40°C to +40°C
Voltage	120-277V*, 347V
LED Life	50,000 Hours
Housing Material	Cast Aluminum
Lens Material	Polycarbonate
Finish	Black
Total Harmonic Distortion	11.7%
Power Factor	>0.9
Mounting Options	Pendant Mount, Suspended Mount
CRI	>70
Dimming	0-10V Dimming*

*Standard



DESCRIPTION

Ruggedly designed highbay fixture series with high efficacy and easy installation features, the RHB2R-LED Series is ideal for industrial, manufacturing, factory environments.

APPLICATIONS



Warehouses



Manufacturing




Factories


FEATURES

- Die cast aluminum housing, polycarbonate lens and polyester powder coat finish
- Ideal replacement for traditional highbays: RHB2R-LED240 replaces 750W MH.
- 2mt cord and mounting hook included with fixture for easy installation
- 4kV surge suppression is standard with 120-277V unit, 6kV surge suppression is standard with 347V unit,
- High efficacy at approximately 135 lumens/watt.
- 3G vibration tested

DIMENSIONS

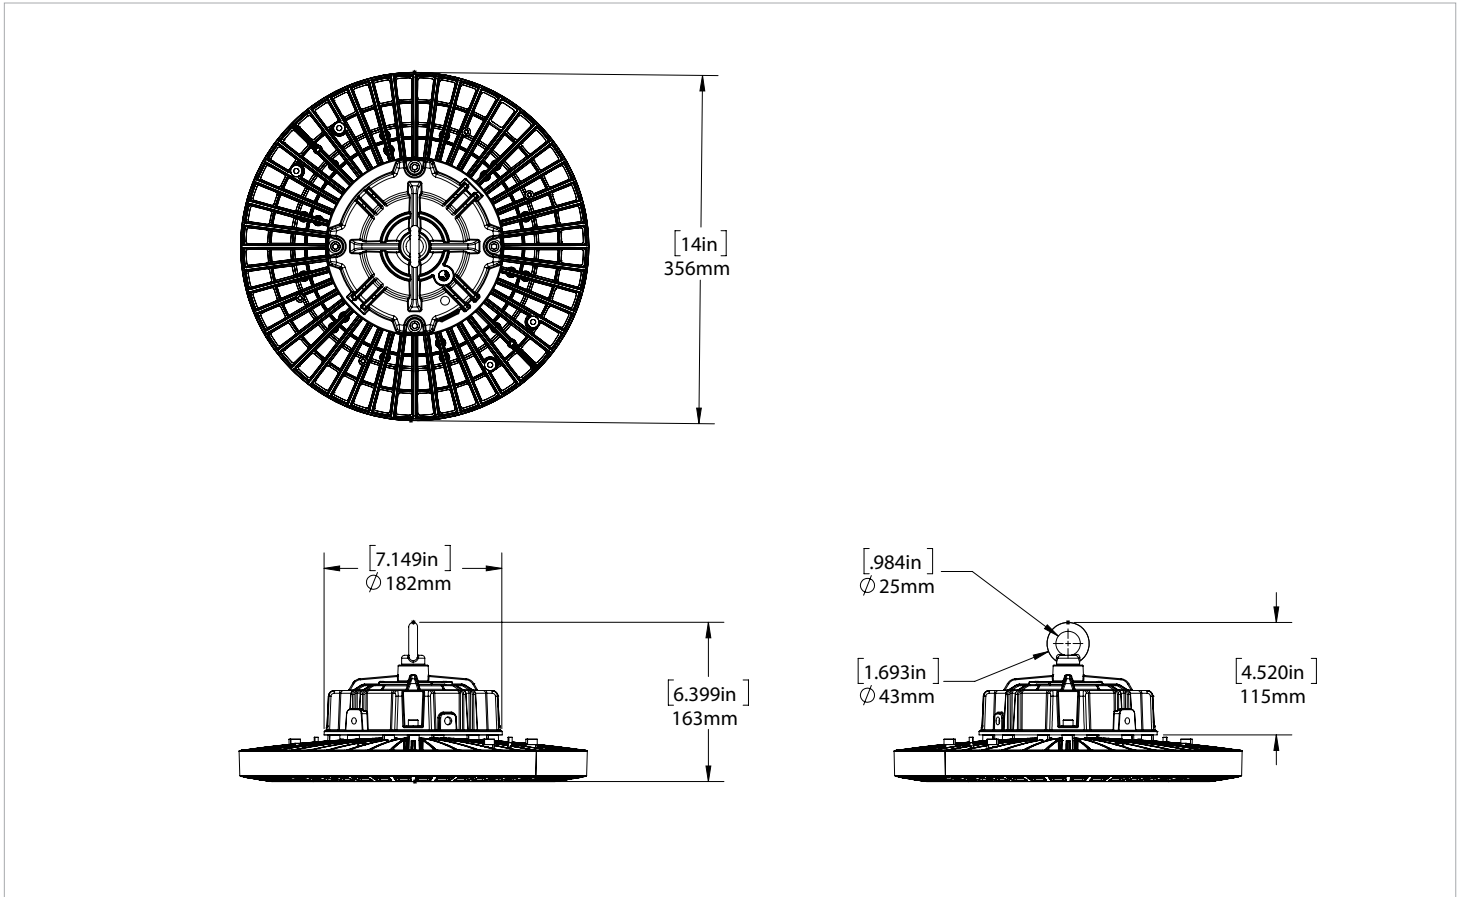

ACCESSORIES

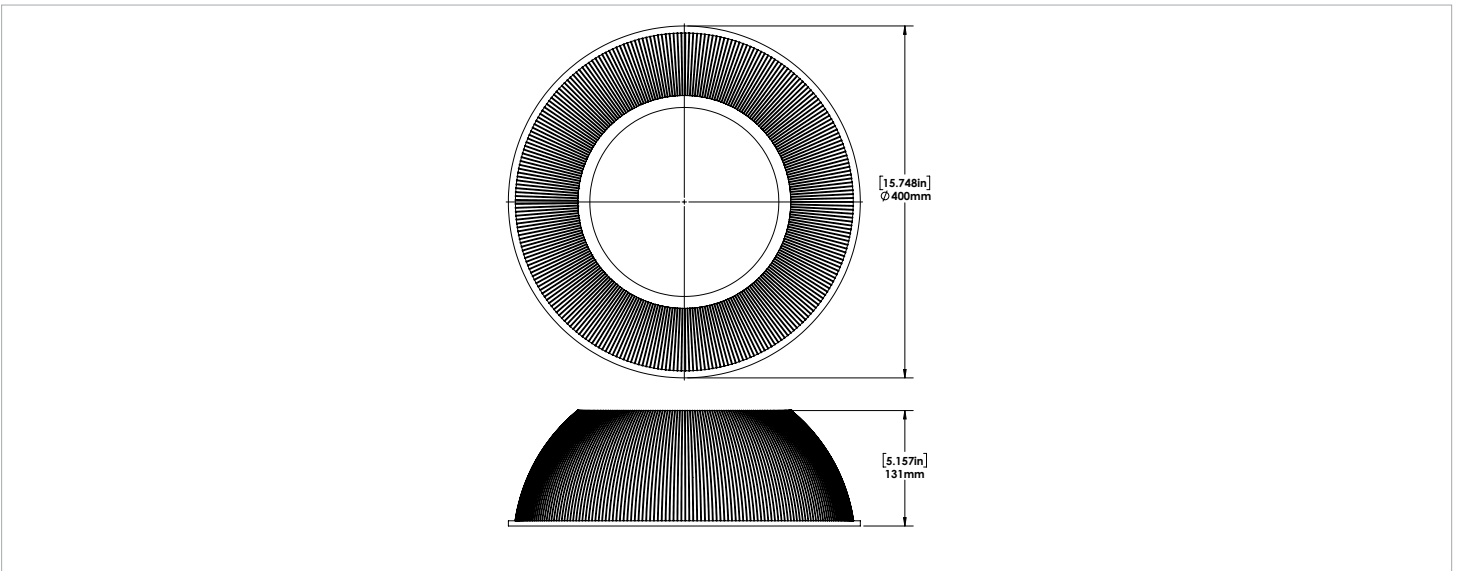

OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
RHB2R-LED240-B-4K-XXX	120-277V	237.9	31840.3	133.8	11.7	0.931	4000	71.6
RHB2R-LED240-B-5K-XXX	120-277V	237	33117.2	139.7	11.7	0.931	4912	74.4
RHB2R-LED240-C-4K-XXX	347V	233.43	31092.9	133.2	18.8	0.913	4000	71.9
RHB2R-LED240-C-5K-XXX	347V	234.59	33147.6	141.3	18.8	0.913	4866	74.6

LEGEND

B - 120V-277V, C - 347V

5K - 5000K, 4K - 4000K

XXX - HOUSING FINISH

ORDERING GUIDE

RHB2R	LED240			
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	
	B - 120-277V*	4K - 4000K*	BLK - BLACK	
	C - 347V	5K - 5000K		

*Standard

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

Prismatic Lens