

Date:

Type:

Project Name:

Part Number:

BRILLIANCE SERIES

LED FIRE RATED RECESSED DOWNLIGHT



2 HOUR FIRE RATING

Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

APPLICATIONS

- Office Lighting
- Commercial Applications
- Damp & Wet location Installation
- Residential

FEATURES

- 2-Hour fire rating providing a reinforced and heat resistant steel casing
- Selectable color temperature: 27K, 3K, 35K, 4K & 5K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED


SPECIFICATION

ORDER#	MODEL NUMBER	SIZE	WATTS	VOLTAGE(V)	HOUR RATING	INITIAL LUMENS	CCT(K)
R36031	RENO-LED-4-S9W-5CCT-FR	4"	9W	120V	50,000	600lm	27K/3K/35K/4K/5K
R36033	RENO-LED-4-S12W-MCCT-WH-FR	4"	12W	120V	50,000	800lm	27K/3K/35K/4K/5K
R36032	RENO-LED-6-S15W-MCCT-WH-FR	6"	15W	120V	50,000	1100lm	27K/3K/35K/4K/5K

Date:	Type:
Project Name:	Part Number:

DIMENSION

4 INCH SLIM PANEL

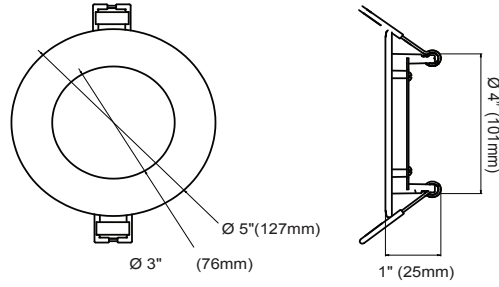

8 INCH SLIM PANEL

