
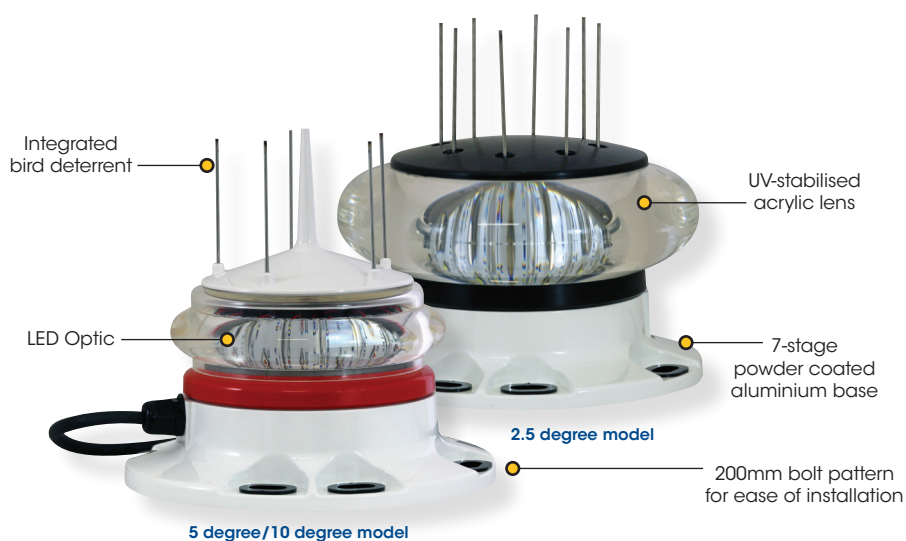


6-13NM Marine Lanterns

SL-155 Series — SL-155-2.5D, SL-155-5D & SL-155-10D

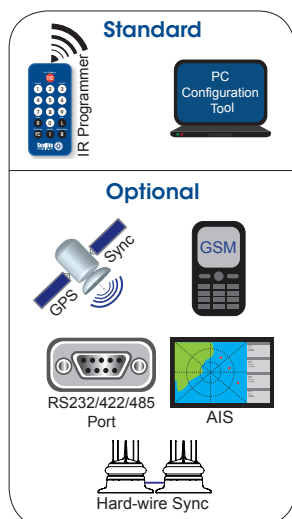

The Sealite Advantage

- Over 9,000cd luminous intensity white
- Compact single tier lantern up to 13NM visible range
- PC or IR Programmer for setup, diagnostic & testing
- Internal or external photocell options
- User configurable day/night lux levels
- Advanced remote monitoring features
- Wide operating voltage range 10 - 30VDC
- Internal data-logging for long term retention of key operational parameters & alarm conditions
- Hardwire synchronisation supporting RS485, RS422
- General purpose inputs (two) & outputs (two)

The SL-155 Series are 6-13NM medium range marine lanterns, available in 2.5, 5, or 10 degree vertical distributions.

Small Form Factor

The single tier SL-155 with multiple intensity adjustments, high levels of efficiency, and minimal wind loading, offers significant advantages over other lens stack assemblies.

Advanced PC or IR Programming

Sealite's convenient PC Configuration Tool or IR programmer allows a host of features to be user set including:

- Multiple intensity settings
- 310 flash settings including custom character
- Automatic effective intensity adjustment
- Adjustable on/off lux levels
- Low battery threshold
- GPS synchronisation offset
- Alarm conditions

Optional GPS Synchronisation

For flash synchronisation of lanterns a GPS module may be fitted.


When lanterns flash in synchronisation they can be clearly distinguished from other nav aids and confusing background lighting - ideal for rivers and channel marking.

Optional GSM Monitoring & Control

The SL-155 lanterns may also be fitted with a GSM Cell-Phone Monitoring and Control System - enabling users to access real-time diagnostics data and change lantern settings via cell-phone. The system can also be configured to send out alarm SMS text messages to designated cellular telephone numbers. Users can also have alarms and reports sent to designated email addresses.

Optional Type 1 or Type 3 AIS

The SL-155 lanterns are available with a class-leading integrated, low-powered Type 1 or Type 3 AIS. When fitted, the AIS is encapsulated within the body of the SL-155 to maintain the weatherproof integrity.



LED lens



IR Remote Programmer






Heavy duty, cast aluminium base

6-13NM Marine Lanterns

SL-155 Series — SL-155-2.5D, SL-155-5D & SL-155-10D

Optical Performance				
Maximum luminous intensity (cd)				
	RED	GREEN	WHITE	YELLOW
2.5deg	5,498	6,594	9,424	4,259
5deg	2,733	2,544	4,470	2,185
10deg	2,368	2,036	3,837	1,670

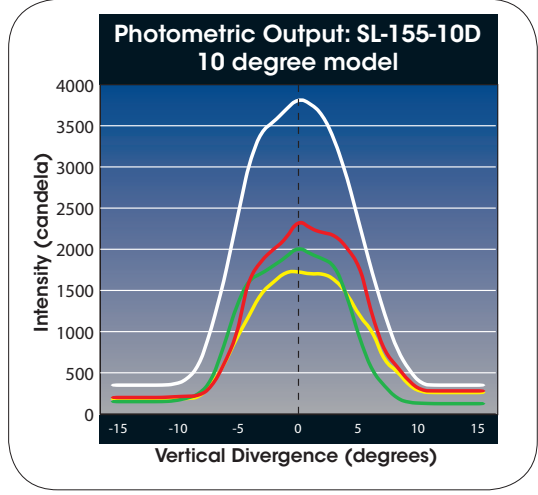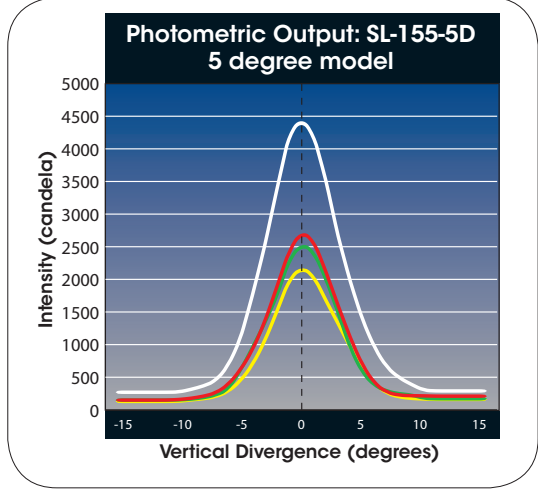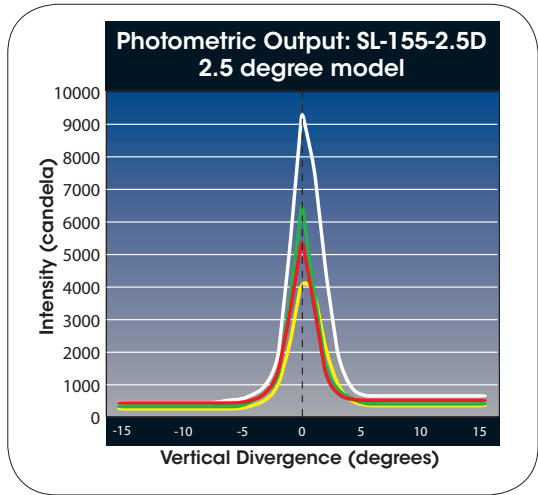


6-13NM Marine Lanterns

SL-155 Series — SL-155-2.5D, SL-155-5D & SL-155-10D

SPECIFICATIONS* * 5° & 10° Models SL-155-5D & SL-155-10D	2.5° Model SL-155-2.5D
Light Characteristics	
Light Source	High efficiency LEDs
Available Colours	Red, Green, White, Yellow
Maximum Luminous Intensity (cd)†	2.5 degree model: Red - 5498 Green - 6594 White - 9424 Yellow - 4259
Visible Range (NM)	10 degree model: Red - 2733 Green - 2544 White - 4470 Yellow - 2185 AT @ 0.74: 6-13 AT @ 0.85: 7.8-19.2
Horizontal Output (degrees)	0° - 360°
Vertical Divergence (degrees)	5° or 10°
Available Flash Characteristics	Up to 310 including 256 IALA recommended, & 1 custom
Intensity Adjustments	User adjustable
LED Life Expectancy (hours)	>100,000
Electrical Characteristics	
Average Power (W)	Variable up to 22
Circuit Protection	Polarity protected
Nominal Voltage (VDC)	12-24
Temperature Range	-40 to 80°C
Physical Characteristics	
Body Material	7-stage powder-coated aluminium
Lens Material	UV-stabilised acrylic
Lens Diameter (mm/inches)	171 / 6¾
Lens Design	Multiple LED optic
Mounting	3 & 4 hole 200mm bolt pattern
Height (mm/inches)	217 / 8½
Width (mm/inches)	230 / 9
Mass (kg/lbs)	5 / 11
Product Life Expectancy	Up to 12 years
Environmental Standards	
Shock	MIL-STD-202G Test Condition H, Method 213B 30G vertical and 35G horizontal shock
Vibration	MIL-STD-202G, Test Condition B, Method 204D 5G in all axes
Immersion	MIL-STD-202G, Method 104A
Salt Fog	Rated to withstand continuous exposure to salt water and spray
Ice Loading	Rated to withstand 22kg/m²
Wind Exposure	Rated to withstand 140knots
Hail Impact	Rated to withstand 25mm diameter ice ball impact at 20m/s
Humidity	0 - 100%, condensing
Driving Rain	at 45° from vertical
Certifications	
CE & Electrical	FCC Part 15 Rules & ICES-003. EN61000-6-1: 2007 (IEC61000-6-1:2005) Part 6-1 Immunity. EN61000-6-3: 2007 (IEC61000-6-3: 2006) Electromagnetic compatibility (EMC) - Part 6-3 Emission. IEC61000-4-2: 2008 Ed 2 Part 4-2 Electrostatic discharge immunity test Level 4. IEC61000-4-3: 2010 Ed 3.2 Part 4-3. Radiated, radio-frequency, electromagnetic field immunity. IEC61000-4-6: 2008 Ed3. , Electromagnetic compatibility (EMC) - Part 4-6 Immunity. Signal colours compliant to IALA E-200-1 ISO9001:2008 IP68
IALA Quality Assurance Waterproof	FCC Part 15 Rules & ICES-003. EN61000-6-1: 2007 (IEC61000-6-1:2005) Part 6-1 Immunity. EN61000-6-3: 2007 (IEC61000-6-3: 2006) Electromagnetic compatibility (EMC) - Part 6-3 Emission. IEC61000-4-2: 2008 Ed 2 Part 4-2 Electrostatic discharge immunity test Level 4. IEC61000-4-3: 2010 Ed 3.2 Part 4-3. Radiated, radio-frequency, electromagnetic field immunity. IEC61000-4-6: 2008 Ed3. , Electromagnetic compatibility (EMC) - Part 4-6 Immunity. Signal colours compliant to IALA E-200-1 ISO9001:2008 IP68
Intellectual Property	
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
Warranty *	3 years
Options Available	<ul style="list-style-type: none"> • GPS Synchronisation • AIS Type 1 or Type 3 • GSM Monitoring & Control System • RS232/422/485 Port • General purpose inputs (2) & outputs (2) • Variety of solar/battery configurations • Serial programming cable • Hard-wire Synchronisation

• Specifications subject to change or variation without notice
* Subject to standard terms and conditions
† Intensity setting subject to solar availability

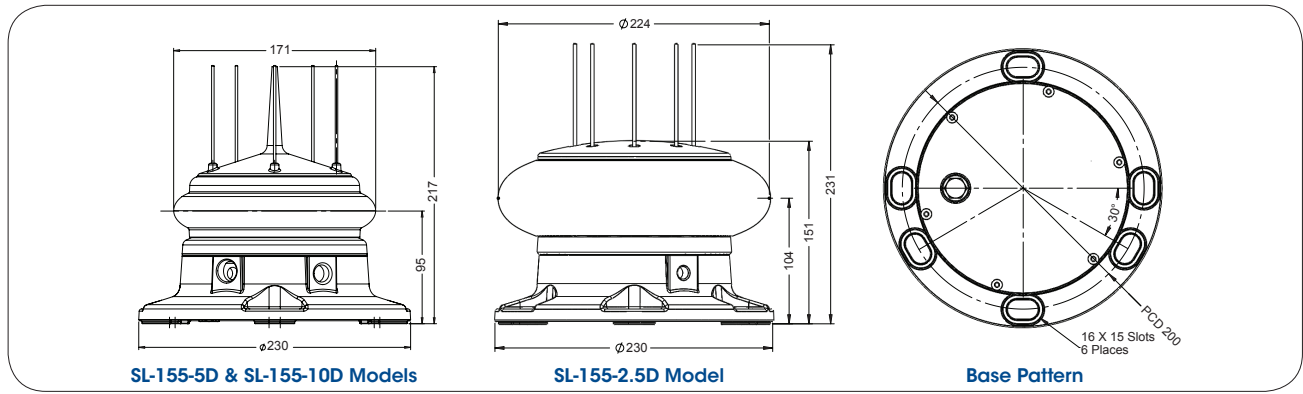



Also available with optional solar power supplies

