



LED Selectable Commercial Recessed Downlights Diffuser Version

Color & Wattage Selectable
Product Specifications



TCP's Selectable Commercial Recessed Downlights offer choices for color temperatures and wattages, making these adaptable for many situations.

Reasons to choose LED Selectable Commercial Recessed Downlights - Diffuser Version from TCP

- 3 selectable wattages
- Selectable colors (30K/35K/41K) or (27K/50K)
- 50,000 hour rated life minimizes replacement and maintenance costs
- Flicker-free Design for consistent lighting
- Mounts directly to ceiling: 4, 6, 8, 10 or 12 inch
- Shatter resistant
- Energy Star® Certified
- Matte silver finish
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 85° beam angle (4"/6"/8"/10")
- 70° beam angle (12")
- Smooth, uniform dimming 100 - 5%


Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

Specifications

Color Temperatures.....(30K/35K/41K) or (27K/30K)
 Wattage Options 4" (7/9/12W), 6" (8/10/15W),
 8" (11/15/19W), 10" (18/23/30W),
 12" (18/23/30W)
 Input Line Voltage 120-277V
 Input Line Frequency..... 50/60HZ
 Dimming..... 0-10V

Lamp Life (rated)..... 50,000 hours
 Minimum Starting Temp -22°F/-30°C
 Maximum Operating Temp..... 104°F/40°C
 CRI..... 80
 IC rated for direct contact with insulation
 UL approved for damp locations



*Based on 12 hours use per day

Specifications



Selectable Commercial Recessed Downlight Diffuser Version (30K,35K,41K)

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	REPLACEMENT WATTS	LUMENS									LPW	CRI
					LOWEST WATTAGE			MIDDLE WATTAGE			HIGHEST WATTAGE				
					3000K	3500K	4100K	3000K	3500K	4100K	3000K	3500K	4100K		
4" Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour															
DLC4SWUZDCCT	LED 4" Comm Downlight CCT	120-277V	7/9/12	65	675	695	690	870	900	895	1150	1200	1190	LW:96.4/99.3/98.6 MW:96.7/100/99.4 HW: 95.8/100/99	80
6" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour															
DLC6SWUZDCCT	LED 6" Comm Downlight CCT	120-277V	8/10/15	85	820	850	865	1030	1080	1095	1430	1530	1515	LW:103/106/108 MW:103/108/110 HW:95/102/101	80
8" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour															
DLC8SWUZDCCT	LED 8" Comm Downlight CCT	120-277V	11/15/19	85	1270	1300	1305	1720	1705	1775	2085	2150	2085	LW:115.5/118.2/119 MW:115/113.7/118.3 HW:110/113.2/110	80
10" Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour															
DLC10SWUZDCCT	LED 10" Comm Downlight CCT	120-277V	18/23/30	100	2100	2150	2150	2590	2660	2660	3205	3330	3305	LW:116.7/119.4/119.4 MW:112.6/115.7/115.7 HW:106.8/111/110.2	80
12" Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour															
DLC12SWUZDCCT	LED 12" Comm Downlight CCT	120-277V	18/23/30	125	2110	2160	2180	2650	2690	2690	3260	3380	3360	LW:117.2/120/121.1 MW:115.2/117/117 HW:108.7/112.7/112	80



LED Selectable Commercial Recessed Downlights Diffuser Version

Specifications

Selectable Commercial Recessed Downlight Diffuser Version (27K,50K)

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	REPLACEMENT WATTS	LUMENS						LPW	CRI
					LOWEST WATTAGE		MIDDLE WATTAGE		HIGHEST WATTAGE			
					2700K	5000K	2700K	5000K	2700K	5000K		
4" Selectable Commercial Recessed Downlight Diffuser Version – 65 Watt Replacement • 50,000 Hour												
DLC4SWUZDCCT2	LED 4" Comm Downlight Diffuser CCT	120-277V	7/9/12	65	700	750	900	1000	1200	1300	LW:100/107.1 MW:100/111.1 HW:100/108.3	80
6" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour												
DLC6SWUZDCCT2	LED 6" Comm Downlight Diffuser CCT	120-277V	8/10/15	85	700	750	1000	1050	1450	1500	LW:87.5/93.8 MW:100/105 HW:96.7/100	80
8" Selectable Commercial Recessed Downlight Diffuser Version – 85 Watt Replacement • 50,000 Hour												
DLC8SWUZDCCT2	LED 8" Comm Downlight Diffuser CCT	120-277V	11/15/19	85	1200	1300	1600	1650	2000	2050	LW:109.1/118.2 MW:106.7/110 HW:105.3/107.9	80
10" Selectable Commercial Recessed Downlight Diffuser Version – 100 Watt Replacement • 50,000 Hour												
DLC10SWUZDCCT2	LED 10" Comm Downlight Diffuser CCT	120-277V	18/23/30	100	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW:97.8/100 HW:95/98.3	80
12" Selectable Commercial Recessed Downlight Diffuser Version – 125 Watt Replacement • 50,000 Hour												
DLC12SWUZDCCT2	LED 12" Comm Downlight Diffuser CCT	120-277V	18/23/30	125	1800	1850	2250	2300	2850	2950	LW:100/102.8 MW:97.8/100 HW:95/98.3	80


Optional Accessories

ITEM NUMBER	DESCRIPTION	DIMENSIONS
EMBACKUPCOMDL1	EMERGENCY BACK UP FOR 4" AND 6" SELECTABLE COMMERCIAL DOWNLIGHT	9.45" X 1.77" X 1.18"
EMBACKUPCOMDL2	EMERGENCY BACK UP FOR 8", 10" AND 12" SELECTABLE COMMERCIAL DOWNLIGHT	12.9" X 2.6" X 2.2"



Dimensions

A	B	C	Item Number
5"	6.2"	4.5"	DLC4SWUZDCCT / DLC4SWUZDCCT2
6.4"	7.8"	5.6"	DLC6SWUZDCCT / DLC6SWUZDCCT2
7.4"	9.2"	7.3"	DLC8SWUZDCCT / DLC8SWUZDCCT2
8.2"	10.9"	9"	DLC10SWUZDCCT / DLC10SWUZDCCT2
9.5"	13"	11"	DLC12SWUZDCCT / DLC12SWUZDCCT2

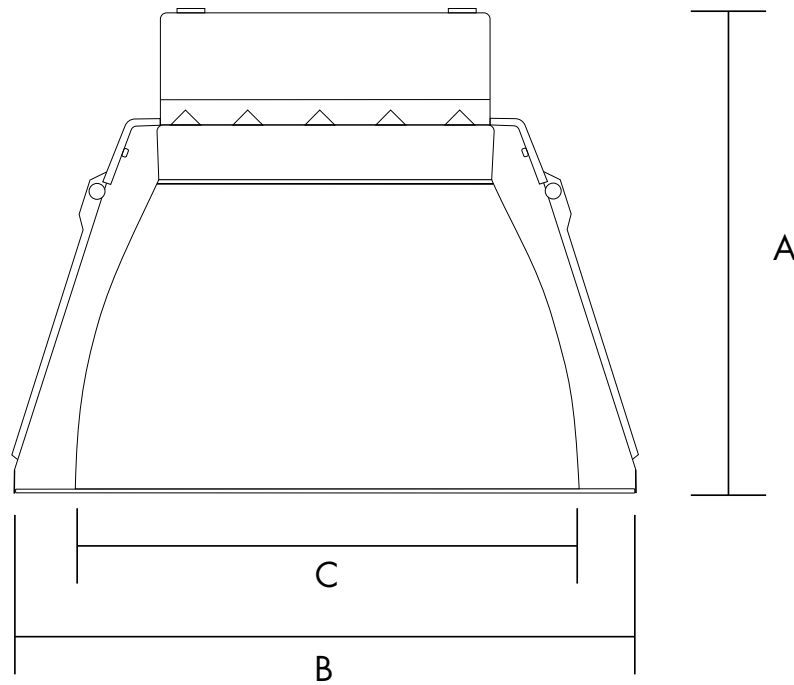

For the most up-to-date specs, please visit www.tcpi.com

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516