

# Good Life LED Filament Lamps

Perfect Reading

Perfect Dining

Perfect Relaxation

TCP's Filament style lamps combine LED technology with the elegance of filament lighting.

## LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS

- Table Lamps
- Sconces
- Chandeliers
- General Lighting
- Floor Lamps
- Ceiling Fixtures
- Outdoor Fixtures
- Decorative

## FEATURES

## BENEFITS

Appearance	Unique filament LED configuration provides a true warm dimming performance from 3200K to 1800K.
Energy Efficient	Up to 85% less energy than halogen lamps
Very low heat generation	Minimizes replacement and maintenance costs
Long life	15,000 hours rated life
UL approved for damp locations	Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors
ANSI Construction Compliant	Fits most general and decorative lighting applications

## SPECIFICATIONS

Input Line Voltage .....	120 VAC
Input Line Frequency.....	50/60HZ
Lamp Life (Rated) .....	15,000 hours
Minimum Starting Temp .....	-20°C
Maximum Operating Temp.....	40°C
CRI .....	80
Base .....	E12/E26

Patent Pending Technology



**3 YEAR WARRANTY**  
\*Based on 12 hours use per day

**RoHS COMPLIANT**





GOOD LIFE LED FILAMENT LAMPS  
 PERFECT READING • PERFECT DINING • PERFECT RELAXATION

ITEM #	DESCRIPTION	VOLTAGE	WATTS	REPLACEMENT WATTS	LUMENS	COLOR	HOURS	CRI	BASE	WARRANTY YEARS	CASE QUANTITY
--------	-------------	---------	-------	-------------------	--------	-------	-------	-----	------	----------------	---------------

**A19 60W**

**8W A19 Lamp • Warm Dimming • 15,000 Hour**

FA19D60GL1	FIL A19 60W DIM GL	120v	8	60	800	3200K-1800K	15,000	80	E26	3	12
------------	--------------------	------	---	----	-----	-------------	--------	----	-----	---	----

**BR30 65W**

**8W BR30 Lamp • Warm Dimming • 15,000 Hour**

FBR30D65GL1	FIL BR30 65W DIM GL	120v	8	65	650	3200K-1800K	15,000	80	E26	3	12
-------------	---------------------	------	---	----	-----	-------------	--------	----	-----	---	----

**Candle 60W**

**5W Candelabra • Warm Dimming • 15,000 Hour**

FB11D60FRGL1	FIL B11 60W DIM FR GL	120v	5	60	500	3200K-1800K	15,000	80	E12	3	12
FF11D60FRGL1	FIL F11 60W DIM FR GL	120v	5	60	500	3200K-1800K	15,000	80	E12	3	12

**G25 40W**


**5W Globe • Warm Dimming • 15,000 Hour**

FG25D60GL1	FIL G25 40W DIM GL	120v	5	40	500	3200K-1800K	15,000	80	E26	3	12
------------	--------------------	------	---	----	-----	-------------	--------	----	-----	---	----

**ST19 60W**

**8W ST • Warm Dimming • 15,000 Hour**

FST19D60GL1	FIL ST19 60W DIM GL	120v	8	60	500	3200K-1800K	15,000	80	E26	3	12
-------------	---------------------	------	---	----	-----	-------------	--------	----	-----	---	----

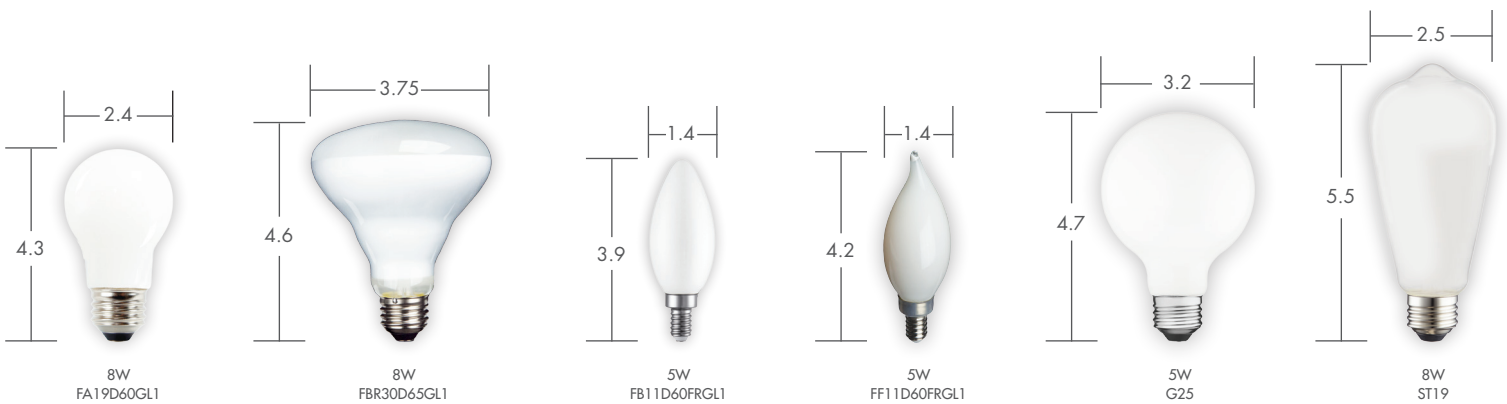

\*Based on 12 hours use per day

For the most up-to-date specs, please visit [www.tcpi.com](http://www.tcpi.com)

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | [tcpi.com](http://tcpi.com)

©TCP JAN 2019 / WF128302