



LED Wet Location S14

Non-Dimmable


Perfect for applications with hard to reach areas, vibration, and frequent starts.

Limitless options for the following applications:

- Chandeliers
- Ceiling Fans
- Decorative
- Indoor Fixtures
- Outdoor Fixtures
- Scoreboards
- Movie Signs

Great features and benefits:

- Long Life: 25,000 hours—no more bulb replacements
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations
- Wet location to replace cold cathodes
- Wet Location S14 lamps are non-dimmable

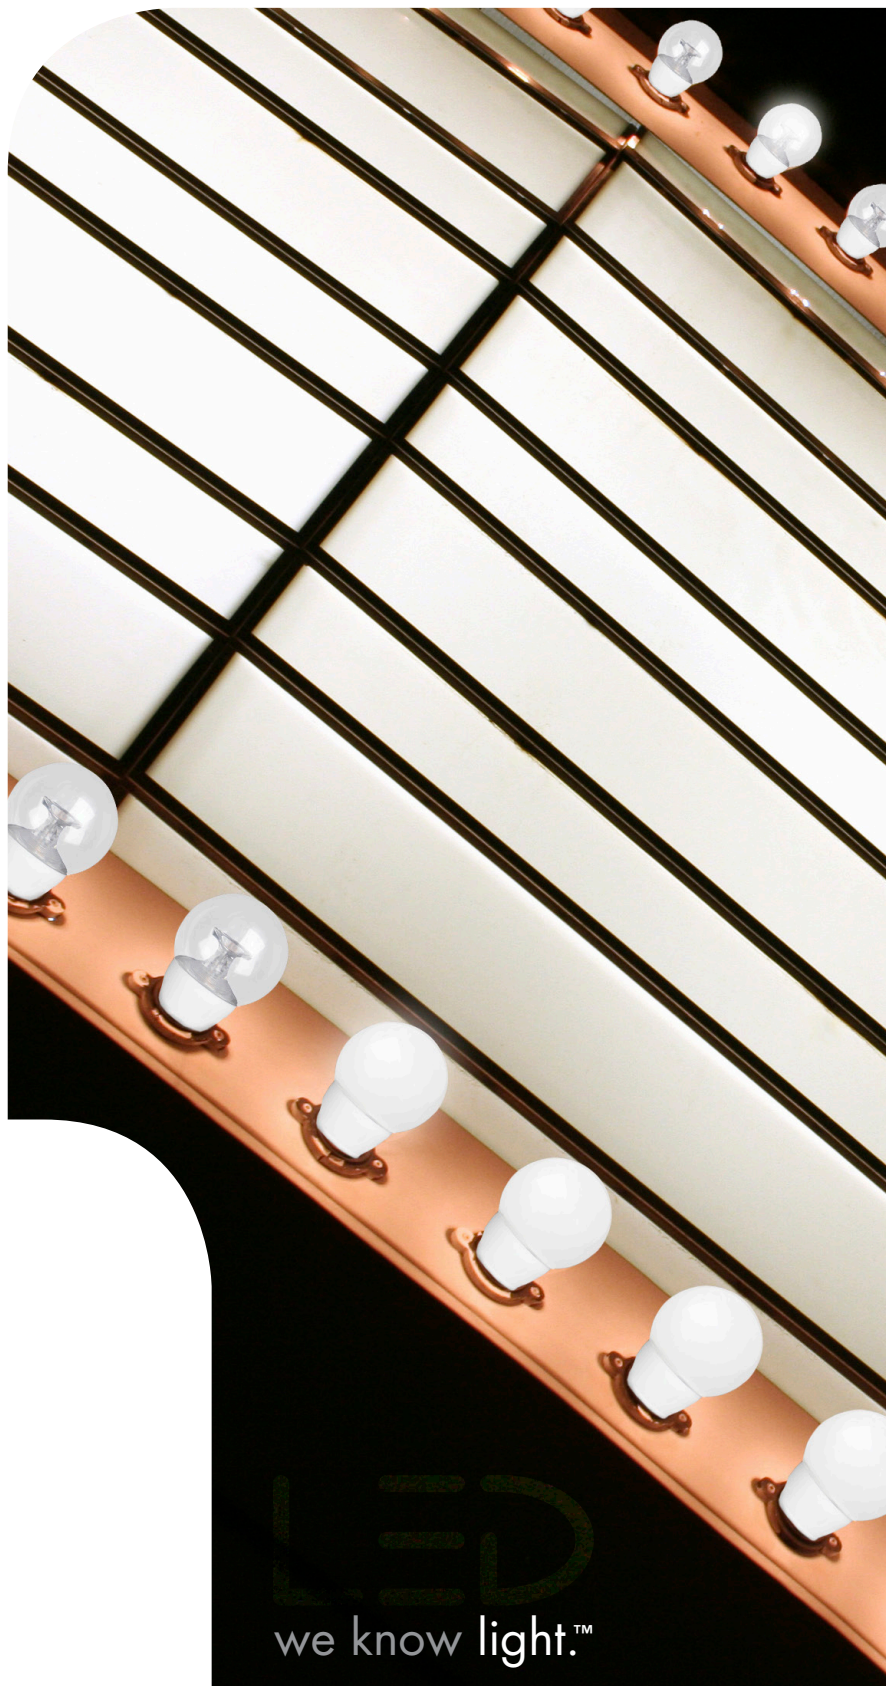

S14 Clear



S14 Frosted

LED
we know light.™



LED	25,000 hours average rated life, 120 volts
------------	--

Applications

Ideal for decorative applications—suitable for outdoor fixtures
Also perfect for applications with hard to reach areas, vibration, and frequent starts

Accent and decorative lighting including:


- + Chandeliers
- + Ceiling Fans
- + Decorative
- + Indoor Fixtures
- + Outdoor Fixtures
- + Scoreboards
- + Movie Signs



- Light output equivalent to 40W
- Cold cathode replacement

Features and Benefits

- Long Life: 25,000 hours—no more bulb replacements
- Excellent white color consistency from bulb to bulb
- UL approved for wet locations
- Wet location to replace cold cathodes
- Wet Location S14 lamps are non-dimmable

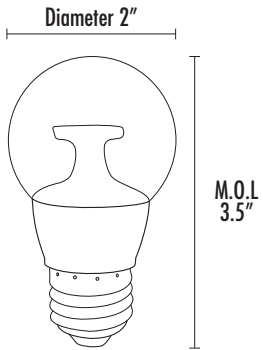

LED5E26S1427K

Catalog Number	
----------------	--

Notes	Type
-------	------



Specifications

Input Line Voltage:	120VAC
Input Line Frequency:	50/60HZ
Lamp Life (Rated):	25,000 hrs
Minimum Starting Temp:	-30°C
Maximum Operating Temp:	40°C
UL/cUL Listed:	Yes
Power Factor:	≥.9
CRI:	80

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Wattage Equivalent	M.O.L. (inches)	Diameter (inches)	Lumens	LPW	CCT	CRI	Enclosed Fixture
5 YEAR WARRANTY 	LED5E26S1427K	LED 5W WET LOCATION S14 - 2700K	120	5.0	40W	3.5	2	300	60	2700K	80	Y
	LED5E26S1430K	LED 5W WET LOCATION S14 - 3000K	120	5.0	40W	3.5	2	300	60	3000K	80	Y
	LED5E26S1441K	LED 5W WET LOCATION S14 - 4100K	120	5.0	40W	3.5	2	300	60	4100K	80	Y
	LED5E26S1427KF	LED 5W WET LOCATION S14 - 2700K Frosted	120	5.0	40W	3.5	2	300	60	2700K	80	Y
	LED5E26S1430KF	LED 5W WET LOCATION S14 - 3000K Frosted	120	5.0	40W	3.5	2	300	60	3000K	80	Y
	LED5E26S1441KF	LED 5W WET LOCATION S14 - 4100K Frosted	120	5.0	40W	3.5	2	300	60	4100K	80	Y
	For the most up-to-date specs, please visit www.tcpi.com											

