

LED FIXTURE

DL Series

LED Vapor Tight DL-VT

Linear 4' or 8' IP65 rated luminaire, suitable for wet locations.



Features & Benefits

CUL listed, DLC Premium

High impact polycarbonate grey housing, IK08

High impact diffuser polycarbonate IK08, Opal lens

Stainless steel mounting brackets included

c/w PG13.5 threaded cable gland

0-10V Dimming / Philips / Meanwell LED Driver

LED module with LG / Everlight chip

130 lm/W

Stainless steel fastening clips

IP 65 rated

Optional microwave motion sensor

L70 @ 50,000 HRS

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and +40°C

*Special environment use, please contact your sales representative

Applications

Indoor or outdoor, suitable for waterproof, dustproof and moistureproof needs**
Parking garage, Truck shop, Stairwell, Breeze way, Corridor, Car wash etc.

Dimensional drawing

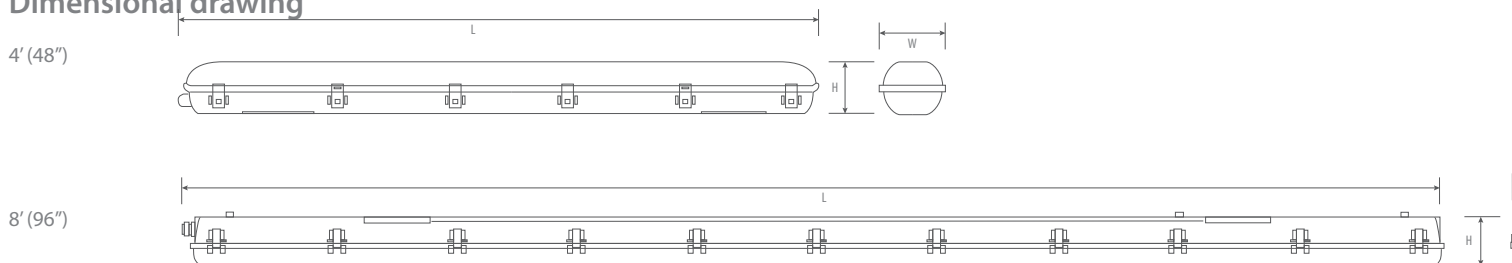

	L	W	H
4' (48")	48.0"	4.9"	4.1"
8' (96")	99.0"	6.3"	4.3"



LED Vapor Tight

DL-VT

Ordering Information Example: DL-VT/4F/40W/40/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage (V)	Dimmable	Options
DL (Deltalum)	VT (Vapor Tight)	4F(4 feet)	40W 60W	35 (3500K) 40 (4000K) 50 (5000K)	120-347V	D (Dimmable)	S (Microwave Motion Sensor)
		8F(8 feet)**	80W 100W 120W		UNV (120-277V) HVU (347-480V)		

** NSF rated

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	M.O.L (inch)	Case QTY.
3665302		DL-VT/4F/40W/35/120-347V/D	40W	120-347V	50,000	120	5,200	3500K	>80	48	4
3665244	Yes	DL-VT/4F/40W/40/120-347V/D	40W	120-347V	50,000	120	5,200	4000K	>80	48	4
3665245	Yes	DL-VT/4F/40W/50/120-347V/D	40W	120-347V	50,000	120	5,200	5000K	>80	48	4
3666306		DL-VT/4F/60W/35/120-347V/D	60W	120-347V	50,000	120	7,800	3500K	>80	48	4
3666238	Yes	DL-VT/4F/60W/40/120-347V/D	60W	120-347V	50,000	120	7,800	4000K	>80	48	4
3666239	Yes	DL-VT/4F/60W/50/120-347V/D	60W	120-347V	50,000	120	7,800	5000K	>80	48	4
3665305		DL-VT/4F/40W/35/120-347V/D/S	40W	120-347V	50,000	120	5,200	3500K	>80	48	4
3665303		DL-VT/4F/40W/40/120-347V/D/S	40W	120-347V	50,000	120	5,200	4000K	>80	48	4
3665304		DL-VT/4F/40W/50/120-347V/D/S	40W	120-347V	50,000	120	5,200	5000K	>80	48	4
3666303		DL-VT/4F/60W/35/120-347V/D/S	60W	120-347V	50,000	120	7,800	3500K	>80	48	4
3666301		DL-VT/4F/60W/40/120-347V/D/S	60W	120-347V	50,000	120	7,800	4000K	>80	48	4
3666302		DL-VT/4F/60W/50/120-347V/D/S	60W	120-347V	50,000	120	7,800	5000K	>80	48	4
3666118	Yes	DL-VT/8F/80W/40/UNV/D	80W	120-277V	50,000	120	10,400	4000K	>80	96	1
3666119	Yes	DL-VT/8F/80W/50/UNV/D	80W	120-277V	50,000	120	10,400	5000K	>80	96	1
3666218	Yes	DL-VT/8F/80W/40/HVU/D	80W	347V-480V	50,000	120	10,400	4000K	>80	96	1
3666219	Yes	DL-VT/8F/80W/50/HVU/D	80W	347V-480V	50,000	120	10,400	5000K	>80	96	1
3666120		DL-VT/8F/100W/40/UNV/D	100W	120-277V	50,000	120	12,500	4000K	>80	96	1
3666221		DL-VT/8F/100W/50/UNV/D	100W	120-277V	50,000	120	12,500	5000K	>80	96	1
3667109	Yes	DL-VT/8F/120W/40/UNV/D	120W	120-277V	50,000	120	15,000	4000K	>80	96	1
3667110	Yes	DL-VT/8F/120W/50/UNV/D	120W	120-277V	50,000	120	15,000	5000K	>80	96	1
3667210	Yes	DL-VT/8F/120W/40/HVU/D	120W	347V-480V	50,000	120	15,000	4000K	>80	96	1
3667211	Yes	DL-VT/8F/120W/50/HVU/D	120W	347V-480V	50,000	120	15,000	5000K	>80	96	1
		"S"	Microwave Motion Sensor								