

## LED FIXTURE

### DL Series

## LED Wrap Around DL-WA1, DL-WA2, DL-WA3

DL-WA1 (LED 4' Wrap Light)

DL-WA2 (LED 2' / 4' Hinged Wrap Light)

DL-WA3 (LED 4' Eco-Wrap Light), Newly added 120-347V Auto-sensing Driver



### Features & Benefits

CUL listed, DLC\*

0-10V dimmable\*

High CRI (80+)

Wall or ceiling mounted

L70 @ \*

PMMA Lens

Damp location rated

Shallow profile, excellent for low ceilings

### Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and +40°C

\* For applicable models, see product specification below

### Applications

Corridors, Carports, storage rooms, retail, commercial, etc.

### Dimensional drawing

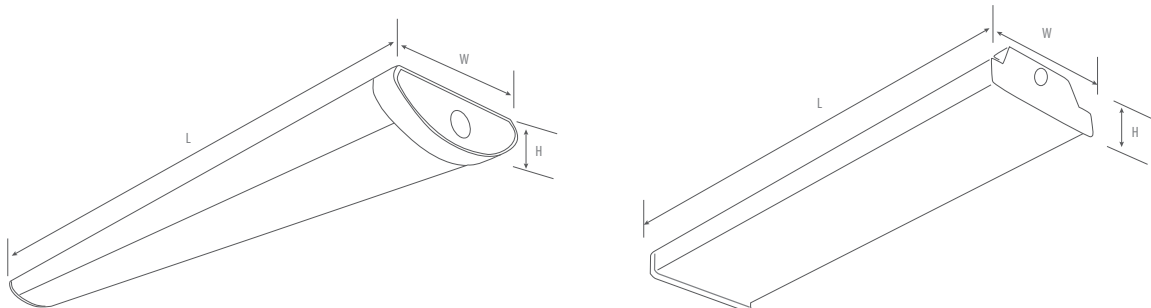

	L	W	H
DL-WA1/4F	48.5"	5.56"	2"
DL-WA2/2F	24.5"	7.09"	2.8"
DL-WA2/4F	48"	7.09"	2.8"
DL-WA3/4F	48.6"	6.5"	2.5"



# LED Wrap Around

## DL-WA1, DL-WA2, DL-WA3

### Ordering Information

Example: DL-WA2/2F/25W/40/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT	Input Voltage	Dimmable	Options
DL (Deltalum)	WA1 (Wrap Around 1)	4F (4')	40W	30 (3000K) 40 (4000K) 50 (5000K)	Blank (120-277V)	Blank (non-dimmable)	
	WA2 (Wrap Around 2)	2F (2') 4F (4')	25W 40W	40 (4000K)	UNV (120-277V)	D (Dimmable)	
	WA3 (Wrap Around 3)	4F (4')	42W	35 (3500K) 40 (4000K) 50 (5000K)	UNV (120-277V) 120-347V	Blank (non-dimmable) D (Dimmable)	

### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3665129		DL-WA1/4F/40W/30	40	120-277V	50,000	120°	4,200	3000K	>80	Yes	48	4
3665124	Y	DL-WA1/4F/40W/40	40	120-277V	50,000	120°	4,200	4000K	>80	Yes	48	4
3665125	Y	DL-WA1/4F/40W/50	40	120-277V	50,000	120°	4,200	5000K	>80	Yes	48	4
3664124	Y	DL-WA2/2F/25W/40/UNV/D	25	120-277V	100,000	120°	3250	4000K	>80	Yes	24.5	4
3665135	Y	DL-WA2/4F/40W/40/UNV/D	40	120-277V	100,000	120°	5200	4000K	>80	Yes	48	4
3665309		DL-WA3/4F/42W/35/120-347V/D	42	120-347V	100,000	120°	5460	3500K	>80	Yes	48	4
3665310		DL-WA3/4F/42W/40/120-347V/D	42	120-347V	100,000	120°	5460	4000K	>80	Yes	48	4
3665136	Y	DL-WA3/4F/42W/35/UNV	42	120-277V	100,000	120°	5460	3500K	>80	Yes	48	4
3665137	Y	DL-WA3/4F/42W/40/UNV	42	120-277V	100,000	120°	5460	4000K	>80	Yes	48	4
3665138	Y	DL-WA3/4F/42W/50/UNV	42	120-277V	100,000	120°	5460	5000K	>80	Yes	48	4
3660052		DL-WA2/2F/LENS	DeltaLum Hinged-Wrap Light 2ft. Replacement PMMA Lens									
3660053		DL-WA2/4F/LENS	DeltaLum Hinged-Wrap Light 4ft. Replacement PMMA Lens									
3660054		DL-WA3/4F/LENS	DeltaLum Eco-Wrap Light 4ft. Replacement PMMA Lens									