



LED LAMP

PURE VISION

PV-A19



Features & Benefits

Energy Star listed*, Dimmable*
 15,000 hour average life
 High CRI (80+)

Enclosed fixture application*
 Damp location approved

Warranty & Cautions


2-year limited warranty
 Operating temperature range between -40°C and +45°C
 UL/cUL listed, FCC compliant, RoHS compliant

* For applicable models, see product specification below

Ordering Information Example: PV-A19/X2/12W/27

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)
PV (Pure Vision)	A19 A19/18 A19/X2	6W, 8.5W, 9W 10W, 12W	50 (5000K), 40 (4000K) 35 (3500K), 30 (3000K) 27 (2700K)

Dimensional drawing

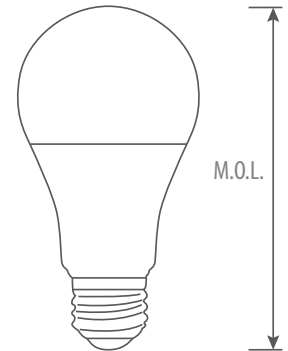

Product Specification

Ordering Code	ES	Model Number	Watts	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	CRI	Enclosed Fixture Application	Damp LOC.	M.O.L. (inch)	Case QTY.
PV-A19 (Dimmable)															
1732218	Y	PV-A19/9W/30/D	9	60W	E26	120	15,000	220°	800	3000	80	Y	Y	4.3	40
1732417	Y	PV-A19/9W/40/D	9	60W	E26	120	15,000	220°	800	4000	80	Y	Y	4.3	40
PV-A19 (Non dimmable)															
1732114	N	PV-A19/18/8.5W/27	8.5	60W	E26	120	15,000	220°	800	2700	80	Y	Y	4.3	40
1732219	N	PV-A19/18/8.5W/30	8.5	60W	E26	120	15,000	220°	800	3000	80	Y	Y	4.3	40
1732418	N	PV-A19/18/8.5W/40	8.5	60W	E26	120	15,000	220°	800	4000	80	Y	Y	4.3	40
1732517	N	PV-A19/18/8.5W/50	8.5	60W	E26	120	15,000	220°	800	5000	80	Y	Y	4.3	40
1732111	Y	PV-A19/X2/12W/27	12	75W	E26	120	15,000	220°	1100	2700	80	Y	Y	4.3	40
1732212	Y	PV-A19/X2/12W/30	12	75W	E26	120	15,000	220°	1100	3000	80	Y	Y	4.3	40
1732412	Y	PV-A19/X2/12W/40	12	75W	E26	120	15,000	220°	1100	4000	80	Y	Y	4.3	40
1732512	Y	PV-A19/X2/12W/50	12	75W	E26	120	15,000	220°	1100	5000	80	Y	Y	4.3	40
1732110	Y	PV-A19/10W/27	10	60W	E26	120	15,000	220°	800	2700	80	Y	Y	4.3	40
1732210	Y	PV-A19/10W/30	10	60W	E26	120	15,000	220°	800	3000	80	Y	Y	4.3	40
1732305	Y	PV-A19/10W/35	10	60W	E26	120	15,000	220°	800	3500	80	Y	Y	4.3	40
1732410	Y	PV-A19/10W/40	10	60W	E26	120	15,000	220°	800	4000	80	Y	Y	4.3	40
1732507	Y	PV-A19/10W/50	10	60W	E26	120	15,000	220°	800	5000	80	Y	Y	4.3	40
1732213	Y	PV-A19/6W/30	6	40W	E26	120	15,000	220°	450	5000	80	Y	Y	4.3	40