

LED FIXTURE

RIGID Series



LED Commercial Downlight RGD-CDR

120-347V LED auto-sensing driver
Selectable Wattage and Selectable Kelvin (CCT)



5-year limited warranty


Operating temperature range -25 °C ~ +40 °C



Features & Benefits

- cETLus listed, Energy Star
- 120-347V LED auto-sensing driver
- Selectable Wattage and Selectable Kelvin
- Range of sizes (4", 6", 8", 10" available)
- Finish color white
- L70 @ 50,000 Hrs, CRI ≥90, Air Tight
- 24" flexible conduit w/ strain relief, 15" safety cable
- 0-10V dimming
- Damp location rated

Dimensional Drawing

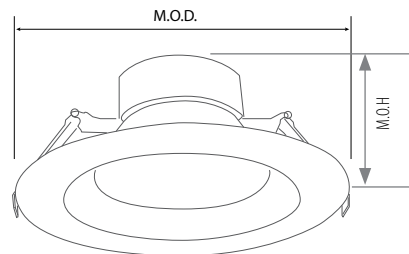

	Cut-out	M.O.D.	M.O.H.
RGD-CDR/4	3.75"	5.91"	3.5"
RGD-CDR/6	6.0"	8.29"	4.0"
RGD-CDR/8	7.5"	10.26"	4.25"
RGD-CDR/10	8.5"	11.28"	4.75"

Ordering Information Example: RGD-CDR/4/12W/MK9/120-347V/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable
RGD (Rigid)	CDR (Commercial downlight, flexible)	4 (4") 6 (6") 8 (8") 10 (10")	12W MW (Selectable Wattage)	MK9 (Selectable Kelvin)	120-347V	WH (White)	D (0-10V Dimming)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	Beam Angle	CRI	Damp Location	M.O.D (inch)	Case QTY.
3682202	Yes	RGD-CDR/4/12W/MK9/120-347V/WH/D	12	120-347V	50,000	980	30-35-40	100°	≥90	Yes	5.91"	6
3680350	Yes	RGD-CDR/6/MW/MK9/120-347V/WH/D	10-12-17	120-347V	50,000	850-1000-1500	30-35-40	100°	≥90	Yes	8.29"	6
3680351	Yes	RGD-CDR/8/MW/MK9/120-347V/WH/D	14-17-20	120-347V	50,000	1200-1500-1850	30-35-40	100°	≥90	Yes	10.26"	6
3680352	Yes	RGD-CDR/10/MW/MK9/120-347V/WH/D	30-35-40	120-347V	50,000	2700-3100-3700	30-35-40	100°	≥90	Yes	11.28"	6