

# LED Full Cutoff Wall Pack



<b>SSL-WP3T</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	Selectable Wattage (25W-150W)	3,250-18,400lm

## Features

- Modern Design Compact Wallpack with Glass diffuser for long life.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +40 °C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (25W - 60W in 60M & 90W - 150W in 150L model).
- Efficacy of  $\geq 120$  lm/W with 120-347V LED Auto-Sensing driver

## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

UV Resistant Glass Cover

### Mounting:

Surface Mounting

### Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ +40 °C


### LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of  $\geq 120$ lm/w.

### Controls:

Compatible with 0-10V Dimming, Photocell Sensor.

## Dimensional Drawing

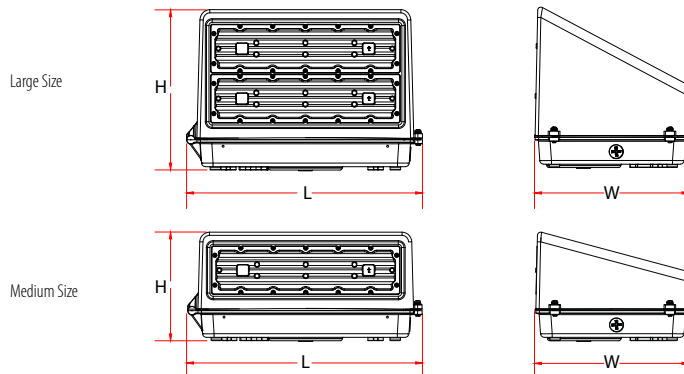


Medium Size



Large Size



## Polar Candela

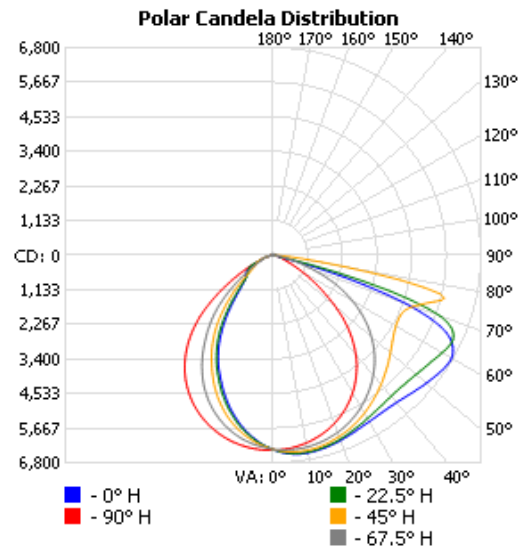

## Applications



Malls



Hotels



Industry



Office Complex

# LED Full Cutoff Wall Pack



<b>SSL-WP3T</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	Selectable Wattage (25W-150W)	3,250-18,400lm

## Ordering Information Example: SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP3T (LED full cutoff wall pack)	60M (Max. 60W, medium size) 150L (Max. 150W, large size)	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	PC (Default)	DB (Dark bronze)

## Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680302	Y	SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB	60-40-25	120-347V	50,000	7800-5200-3250	30-40-50	≥80	Yes	14.17"×9.29"×6.54"	1
3680303	Y	SSL-WP3T/150L/MW/MK/120-347V/D/PC/DB	150-120-90	120-347V	50,000	18400-15600-11700	30-40-50	≥80	Yes	14.17"×9.29"×9.65"	1

## Related Products



SSL-XHC2



SSL-WP1TS



SSL-WP2T



DL-VT2