

LED LAMP

VIVID Series





A21

A21 3WAY

PS25 E26

PS30 EX39

VIV-PS25, VIV-PS30, VIV-A21

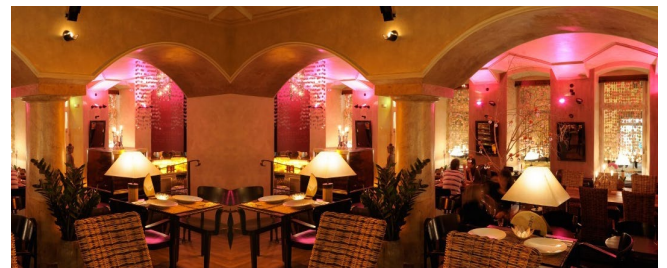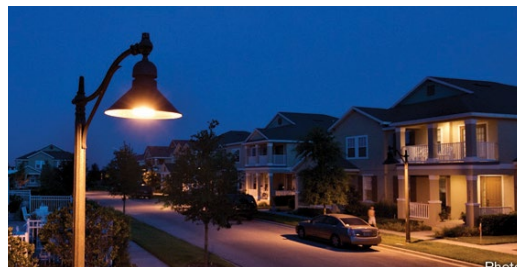

Features & Benefits

Energy Star listed, DLC listed for PS30

High lumen output

Damp location rated


* For applicable models, see product specification below

Beam angle 230°

Enclosed fixture application, Dimmable*

High CRI (90+)*

Dimensional drawing

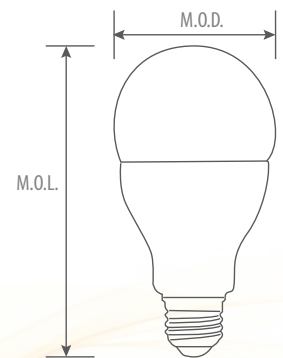

Warranty & Cautions

15,000hrs: 2-year; 25,000hrs: 3-year; 50,000hrs: 5-year limited warranty

Operating temperature range between -40°C and +40°C

Product Specification

Ordering Code	Energy Star / DLC	Model Number	Watts	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	CRI	Enclosed Fixture Application	Damp Location	Dimmable	M.O.D. (inch)	M.O.L. (inch)	Case QTY.
1754406	ES	VIV-PS25/27W/40/E26	27	E26	120-277	25,000	230°	3200	4000	80	Y	Y	N	3.23	6.73	40
1755404	DLC	VIV-PS30/36W/40/EX39	36	EX39	120-277	50,000	230°	5000	4000	80	Y	Y	N	3.74	7.28	40
1764210	ES	VIV-A21/23W/30/D	23	E26	120	15,000	230°	2550	3000	80	Y	Y	Y	2.63	4.8	40
1753200	ES	VIV-A21/190/18W/30/D	18	E26	120	25,000	230°	2000	3000	90	Y	Y	Y	2.63	4.8	40
1763232	ES	VIV-A21/3WAY/15W/27/D	15/10/5	E26	120	15,000	230°	1600/1100/600	2700	80	Y	Y	Y	2.63	4.8	40