

# LED LAMP

VIVID Series



## LED T5 TUBE Ballast Bypass



5-year limited warranty

Operating temperature range -20 °C ~ +45 °C




### Features & Benefits

- cULus listed, DLC approved
- Replacement for T5 HO linear fluorescent, 120-347V
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Double-ended installation, surge protection
- Our safety features allow for installation as well as misapplication protection<sup>1</sup>
- NSF/ANSI 2 certified<sup>2</sup>
- Beam angle 180°, High CRI (83+)
- 50,000 hour life (L70)

<sup>1</sup>Contact your local Turolight representative for detail <sup>2</sup> Shatterprotect utilizes PET film to reduce the unexpected risk of shattering

### Dimensional Drawing

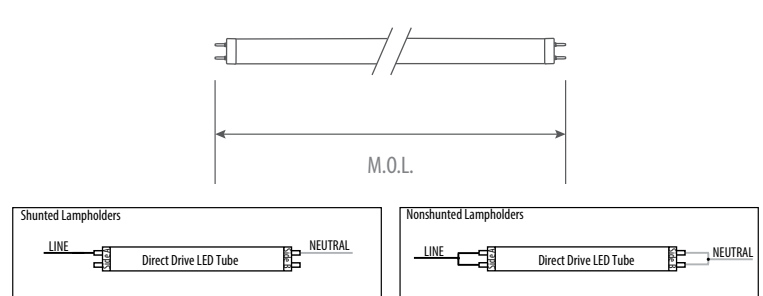

### Ordering Information Example: VIV-T5BPSP4/25W/30/F/120-347V

Family Name	Lamp Type	Wattage	CCT	Frost	Voltage
VIV (Vivid)	T5BPSP4 (Bypass, PET film, shatterprotect)	25W	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	F (Frost)	120-347V

### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Base	Hour Rating	Beam Angle	Initial Lumen (lm)	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
<b>Replace T5 HO 120-347V</b>												
-	Y	VIV-T5BPSP4/25W/30/F/120-347V (4FT HO)	25	120-347V	G5	50,000	180	3200	3000	83	48	25
-	Y	VIV-T5BPSP4/25W/35/F/120-347V (4FT HO)	25	120-347V	G5	50,000	180	3200	3500	83	48	25
1754407	Y	VIV-T5BPSP4/25W/40/F/120-347V (4FT HO)	25	120-347V	G5	50,000	180	3300	4000	83	48	25
1754504	Y	VIV-T5BPSP4/25W/50/F/120-347V (4FT HO)	25	120-347V	G5	50,000	180	3400	5000	83	48	25