

# LED LAMP

## VIVID Series

Bypass T8 8ft



VIV-T8BPSP4/Fa8 (8ft, Double-ended)  
 VIV-T8BPSP4/R17d (8ft, Double-ended)

### Features & Benefits


- DLC approved\*, PET film, ShatterProtect<sup>1</sup>
- External ballast not required
- Fa8, R17d base selection
- 120-277V & 347V, 180° Beam angle

\*For applicable models, see product specification below  
<sup>1</sup>ShatterProtect utilizes PET film to reduce the unexpected risk of shattering  
 \*\* Need to work with NSF certified lighting fixtures

- High CRI (82+), 50,000 hour life (L70)
- NSF/ANSI 2 certified\*\*
- Use existing lamp holders
- Suitable for splash zones of food equipment
- Our safety features allow for installation as well as misapplication protection<sup>2</sup>

<sup>2</sup>Contact your local Turolight representative for detail

### Dimensional drawing

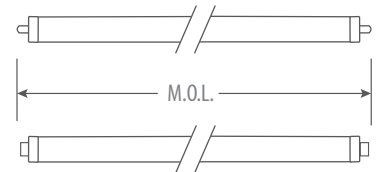

### Warranty & Cautions

- 5-year limited warranty
- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant

### Ordering Information

LED CLASS	LAMP TYPE	Bypass, Shatterproof	WATTAGE	CCT(K)	FROST	INSTALLATION	INPUT VOLTAGE
VIV (Vivid)	T8	BPSP4/Fa8 (Bypass, PET film, Fa8 Base) BPSP4/R17d (Bypass, PET film, R17d Base)	42W	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	F (Frost)	DE (Double-ended)	Blank (120-277V) 347V

### Product Specification

Ordering Code	DLC	Model Number	Watts (W)	Voltage (V)	Initial Lumen (lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
T8 Bypass PET film IV 8ft Fa8 120-277V, Double-ended												
1755200	Y	VIV-T8BPSP4/Fa8/42W/30/F/DE (8FT)	42	120-277	5300	Fa8	50,000	180°	3000	82	96	8
1755300	Y	VIV-T8BPSP4/Fa8/42W/35/F/DE (8FT)	42	120-277	5300	Fa8	50,000	180°	3500	82	96	8
1755400	Y	VIV-T8BPSP4/Fa8/42W/40/F/DE (8FT)	42	120-277	5400	Fa8	50,000	180°	4000	82	96	8
1755500	Y	VIV-T8BPSP4/Fa8/42W/50/F/DE (8FT)	42	120-277	5500	Fa8	50,000	180°	5000	82	96	8
T8 Bypass PET film IV 8FT R17d 120-277V, Double-ended												
1755201	-	VIV-T8BPSP4/R17d/42W/30/F/DE (8FT)	42	120-277	5300	R17d	50,000	180°	3000	82	96	8
1755301	-	VIV-T8BPSP4/R17d/42W/35/F/DE (8FT)	42	120-277	5300	R17d	50,000	180°	3500	82	96	8
1755401	-	VIV-T8BPSP4/R17d/42W/40/F/DE (8FT)	42	120-277	5400	R17d	50,000	180°	4000	82	96	8
1755501	-	VIV-T8BPSP4/R17d/42W/50/F/DE (8FT)	42	120-277	5500	R17d	50,000	180°	5000	82	96	8
T8 Bypass PET film IV 8FT Fa8 347V, Double-ended												
1755202	Y	VIV-T8BPSP4/Fa8/42W/30/F/DE/347V	42	347	5300	Fa8	50,000	180°	3000	82	96	8
1755302	Y	VIV-T8BPSP4/Fa8/42W/35/F/DE/347V (8FT)	42	347	5300	Fa8	50,000	180°	3500	82	96	8
1755402	Y	VIV-T8BPSP4/Fa8/42W/40/F/DE/347V (8FT)	42	347	5400	Fa8	50,000	180°	4000	82	96	8
1755502	Y	VIV-T8BPSP4/Fa8/42W/50/F/DE/347V (8FT)	42	347	5500	Fa8	50,000	180°	5000	82	96	8
T8 Bypass PET film f IV 8FT R17d 347V, Double-ended												
1755203	-	VIV-T8BPSP4/R17d/42W/30/F/DE/347V (8FT)	42	347	5300	R17d	50,000	180°	3000	82	96	8
1755303	-	VIV-T8BPSP4/R17d/42W/35/F/DE/347V (8FT)	42	347	5300	R17d	50,000	180°	3500	82	96	8
1755403	-	VIV-T8BPSP4/R17d/42W/40/F/DE/347V (8FT)	42	347	5400	R17d	50,000	180°	4000	82	96	8
1755503	-	VIV-T8BPSP4/R17d/42W/50/F/DE/347V (8FT)	42	347	5500	R17d	50,000	180°	5000	82	96	8