


## LED Vapor Tight

Order Code: VP10923

#### DLC® Model# VP4-38N8D-BF6

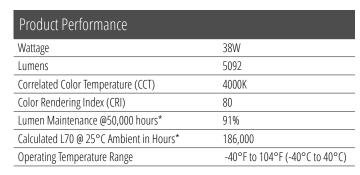

Physical Characteristics	
Fixture Color	Gray
Length	49.8"
Width	5.0"
Height	3.5"

Electrical Characteristics	
Amperage Draw (Input Volts/Am	nps) 120-277V 0.37A Max

Regulatory Qualifications
UL Listed
Suitable for wet locations
IP65 Rating
NEMA Type 4X Enclosure Rating
DLC Premium Qualified – Model # VP4-38N8D-BF6

## Accessories

EM – add suffix "-EM" to order code for a factory installed Battery Backup

SP12714 - 120-277V Surge Protector

PH58143 – Wet Rated Motion Only Control Sensor – Long Extension

PH52171 – Wet Rated Motion/Photocell/Dimming Control Sensor – Long Extension



#### Description

Venture's LED Vapor Tight fixtures are designed for use in harsh environments such as utility lighting, maintenance areas, parking garage and tunnels.

### Construction

The fixture is a non-corrosive construction with a one-piece polycarbonate housing and lens. The diffuse gasketed lens is secured by non-corrosive stainless steel clips. The versatile fixtures not only are IP65 rated, but also have been tested to the NEMA Type 4X enclosure rating which enables these fixtures to be used in a variety of harsh applications.

#### Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC continuous dimming capability to 10%.

#### Mounting

Fixtures are supplied with surface mounting clips and V-Hooks for chain mounting (chain not included). The lightweight design allows for easy installation/replacement of existing fixtures.

For warranty information refer to: https://www.venturelighting.com/resources/ warranties

\*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21











# Venture LED Vapor Tight





(800) 451-2606 Fax: (800) 451-2605 7905 Cochran Rd, Suite 300 Glenwillow, Ohio 44139 E-mail: Venture\_Lighting@VentureLighting.com VentureLighting.com

