



LED Vapor Tight

Order Code: VP28516



Description

Venture's LED Vapor Tight fixtures are designed for use in harsh environments. Optimal for parking driver lane compliance. For use as utility lighting, parking garage and tunnels, maintenance areas.

Construction

The fixture is a non-corrosive construction with a one piece fixture housing and lens. The diffuse gasketed polycarbonate lens is secured by non-corrosive stainless steel clips. The versatile fixtures not only are IP65 rated but also have been tested to the NEMA Type 4X enclosure rating which enables these fixtures to be used in a variety of unique applications. 1/2" knock-outs are available on both sides of the fixture as well as on the top of the fixture.

Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC dimming as a standard.

Mounting

Fixtures are supplied with surface mounting clips and V-Hooks for chain mount-ing. The lightweight design allows for easy installation/replacement of existing fixtures.

DLC Model# VP4-52NA-BF5

Product Performance

Wattage	52W
Lumen Output	6760
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Lumen Maintenance @50,000 hours*	87%
Calculated L70 @ 25°C Ambient in Hours*	122,000
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	Gray
Width	5.1"
Length	49.8"
Height	3.94"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.45 208/0.27 240/0.23 277/0.20
----------------------------------	-------------------------------------

Regulatory Qualifications

cULus Listed
Suitable for wet locations
IP Rating - IP65
DLC Model # VP4-52NA-BF5
NEMA Type 4X Enclosure Rating

Accessories

Surface mount clips and V-Hook for dual point chain or cable hanging included
SP12714 - 120-277V Surge Protector
PH58143 - Wet Rated Motion Only Control Sensor - Long Extension
PH52171 - Wet Rated Motion/Photocell/Dimming Control Sensor - Long Extension
For a factory installed Battery Backup add "-EM" after order code (Lumens: 1860) (0-50°C) †

NOTE: †Operating temperature range for Battery Backup.

NOTE:

*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11





NEMA 4X



VENTURE
LIGHTING

Venture LED Vapor Tight

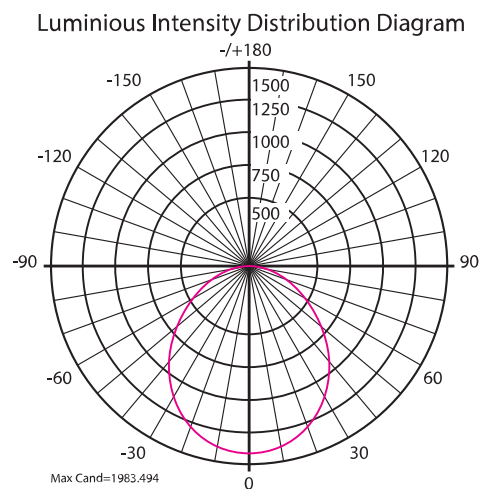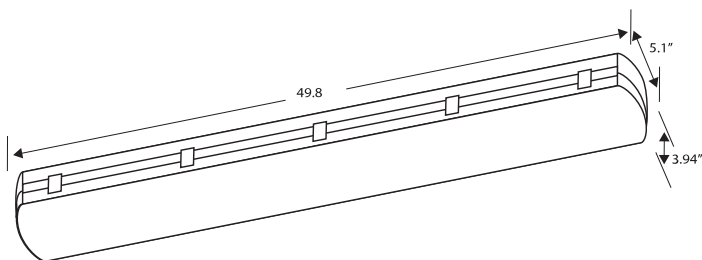

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

