


Regular Wall Pack



Technical Specifications

Model No.	Power	Input	Lumens	Cover	Brightness	Dimension (Inch)	Dimming	Housing Color
AST-SWP05M-60WBSGSC1-BR50	60W	120-347V	7800-8400 LM	Glass	5000K	14.25x9.37x9.84	0-10 V	Bronze
AST-SWP05M-60WBSGDC1-BRWe	30/40/60W (Adjustable)				3000/4000/5000K (Adjustable)			
AST-SWP05M-80WBSGSC1-BR50	80W		9300-10400 LM		5000K			
AST-SWP05M-80WBSGDC1-BRWe	60/70/80W (Adjustable)				3000/4000/5000K (Adjustable)			
AST-SWP05M-100WBSGSC1-BR50	100W		12000-13500 LM		5000K			
AST-SWP05M-100WBSGDC1-BRWe	60/70/80/90/100W (Adjustable)				3000/4000/5000K (Adjustable)			
AST-SWP05M-120WBSGSC1-BR50	120W		14400-16200 LM		5000K			
AST-SWP05M-120WBSGDC1-BRWe	80/90/100/110/120W (Adjustable)				3000/4000/5000K (Adjustable)			




Advantage

- UL cUL certificate
- Lumileds 2835, high CRI
- Input Voltage: 120-347VAC
- Output constant current lever can be adjusted through output cable with 0-10V
- Wattage adjustable
- No UV or IR in the beam
- Easy to install & operate
- Energy saving, long lifespan
- Light is soft & uniform, safe to eyes
- Instant start, No flickering, No humming
- Green & Eco-friendly without mercury

Application

- Entrance lighting, Courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area & so on.

Light Distribution Testing Parameters

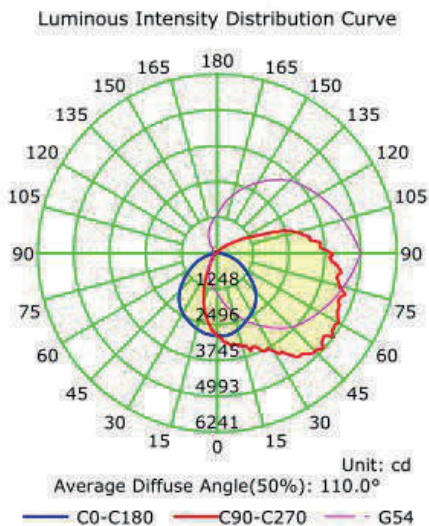

Dimensions

