


Features

- IC Rated
- Airtight
- Dimmable
- Work with most of existing dimmer in market
- Five years limited warranty
- Not for emergency lighting
- Suitable for damp locations







360° Rotation

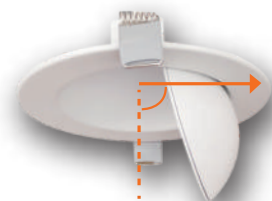


90° Tilt

| | 3WAY CCT Adjustable | | | 5WAY CCT Adjustable | | |
|-----------------------|---------------------|------------------|------------------|-------------------------|-------------------------|-------------------------|
| Mode No. | DL4-023-8WH8345 | DL4-023-8BK8345 | DL4-023-8BN8345 | DL4-148-9WH5CS | DL4-148-9BK5CS | DL4-148-9BN5CS |
| Dimension | Ø4.7"x1.1" | Ø4.7"x1.1" | Ø4.7"x1.1" | Ø4.7"x1.1" | Ø4.7"x1.1" | Ø4.7"x1.1" |
| Fixture Color | White | Black | Brushed nickel | White | Black | Brushed nickel |
| Watts | 8W | 8W | 8W | 9W | 9W | 9W |
| Volts | 120V | 120V | 120V | 120V | 120V | 120V |
| CRI | 80 | 80 | 80 | 80 | 80 | 80 |
| Color Temperature | 30K,40K,50K ADJ | 30K,40K,50K ADJ | 30K,40K,50K ADJ | 27K,30K,35K,40K,50K ADJ | 27K,30K,35K,40K,50K ADJ | 27K,30K,35K,40K,50K ADJ |
| Initial Lumens | 700 | 700 | 700 | 750 | 750 | 750 |
| Beam Angle | 40° | 40° | 40° | 40° | 40° | 40° |
| Operating Temperature | (-4°F) - (104°F) | (-4°F) - (104°F) | (-4°F) - (104°F) | (-4°F) - (104°F) | (-4°F) - (104°F) | (-4°F) - (104°F) |
| Average Rated Life | 50000H | 50000H | 50000H | 50000H | 50000H | 50000H |
| Weight(g) | 440 | 440 | 440 | 440 | 440 | 440 |
| Warranty | 5 years | 5 years | 5 years | 5 years | 5 years | 5 years |



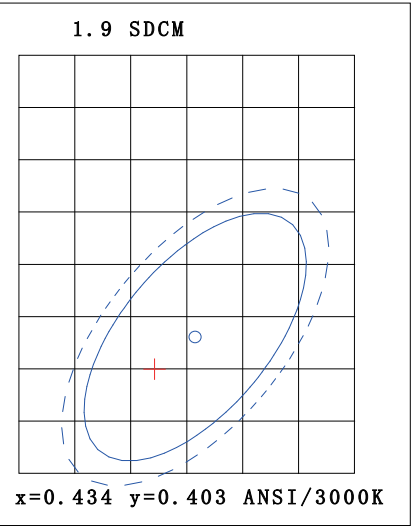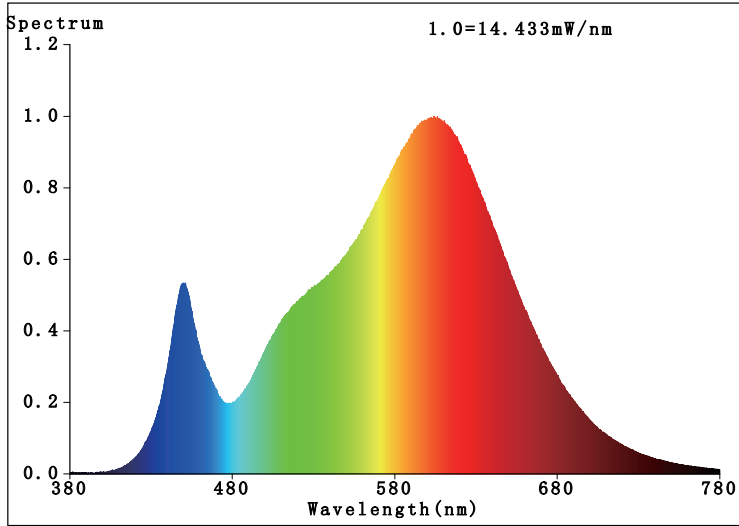

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

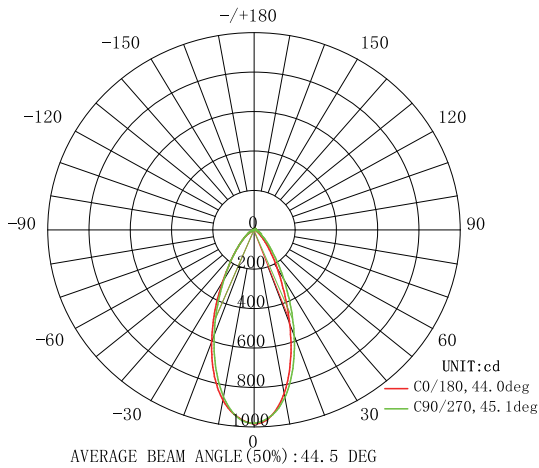

AAI Figure

