

210x290mm 20.9.21



Innovation & Quality

www.votatec.ca

3Way CCT 4FT Vapor Fixture


J5236KLDB-45W-40
J5236KLDB-45W-50
J5236KLDX-DU45W-3CCT

3Way CCT 4FT Vapor Fixture



Specification

Model No.	Power	Input Voltage	Dimming	Brightness	CCT	L x W x H
J5236KLDB-45W-40	45W	120-347V	0-10V	5850LM	4000K	47.2" x 4.9" x 3.6"
J5236KLDB-45W-50	45W	120-347V	0-10V	5850LM	5000K	47.2" x 4.9" x 3.6"
J5236KLDX-DU45W3-CCT	45W	120-347V	0-10V	5850LM	4000K/5000K/6500K	47.2" x 4.9" x 3.6"

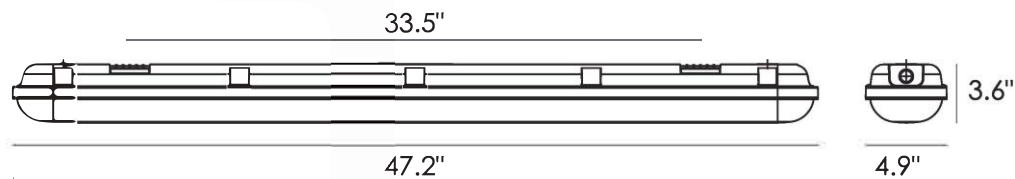

General Characteristics

Fixture Life Hours
Material
Bulb
Lumens Per Watt (LPW)

Safety Rating

Ingress Protection
Dimmable
Dimming Type

Fixture Characteristics

Shape
Number of Lights
Mounting
Use Location

Electrical Characteristics

Watts
Volts
Power Factor
Operating Temperature

Light Characteristics

Brightness
Color Accuracy (CRI)
Light Appearance
Color Temperature
Beam Angle

Product Dimensions

Item Dimensions (in)

70000 Hours
PC
Integrated LED
130.00
cULus Listed-Wet Location
IP65
True
0-10V

Linear
1 - Lighter In series
Surface
Outdoor / Indoor

45 W
120-347V
0.95
(-)25 To 50°C

5850 Lumens
80
Warm White
4000K / 5000K / 6500K
°110

(L) 47.2 (W) 4.9 (H) 3.6

