
www.votatec.ca

Slim Flush Mount LED

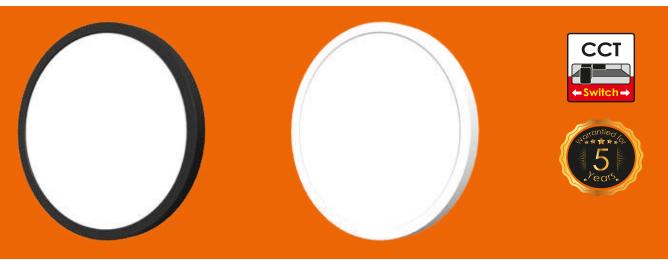

Specifications:

	WHITE	BLACK
Model	PL16-PR5-11W120-3CCT-WSA /WH	PL16-PR5-11W120-3CCT-BSA /BK
Power	11W	11W
ССТ	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Brightness	760LM	760LM
LED Type	SMD2845 / 90PCS	SMD2845 / 90PCS
Voltage	120V	120V
Power Efficiency	≥0.9	≥0.9
RA	≥80	≥80
Beam Angle	110°	110°
Dimension	5.3″x0.6"	5.3″x0.6"

Features:

- Built-in driver, 17.5mm thickness
- White & Black two different colors available
- Good Quality LGP & diffuser Plate
- Stable design for the whole structure
- SMT technology, ensuring accurate for LEDs on FPCB
- 3 CCT tunable
- 120V, Triac dimming
- 5 Years warranty













5" Slim Flush Mount LED

3 Way CCT Adjustable

www.votatec.ca

Perfect LED Mounting

Uniform Light Distribution

Black dots and shadow on the light, un-uniform lighting, which are the headache in the LED panel field.

The LED Light Strip

SMT technology, ensuring accurate positions for LEDs on FPCB Good quality LGP and diffuser plate Stable design for the whole structure Above ensures u iform lighting, no black dots and shadow.




Surface Mounted With J-Box


Light Distribution



Dimensions:



PL16-PR5-11W120-3CCT-WSA



PL16-PR5-11W120-3CCT-BSA

