

### Specification:


Model No.:	Size	Wattage (W)	Efficacy (lm/W)	Color Temp (K)	CRI	Dim solution	Voltage
VO-22W40-347-5Way-B-SX	2x2 ft	20-25-30-35-40W	110lm/W DLC Standard	3000K- 3500K- 4000K- 5000K- 6000K Adjustable	Ra>80	0-10V	120-347V
VO-14W40-347-5Way-B-SX	1x4 ft	20-25-30-35-40W					
VO-24W50-347-5Way-B-SX	2x4 ft	25-30-40-45-50W					
VO-22W40-347-5Way-B-PX	2x2 ft	20-25-30-35-40W	125lm/W DLC Premium				
VO-14W40-347-5Way-B-PX	1x4 ft	20-25-30-35-40W					
VO-24W50-347-5Way-B-PX	2x4 ft	25-30-40-45-50W					

### Features:



- No LGP , never yellowing.
- High efficacy up to 125lm/w, meet DLC 5.1 premium version.
- Series: Color & Wattage tunable.
- 5 Years warranty

### Applications:


- Power Factor: >0.9
- CRI:>80
- Warranty : 5 years

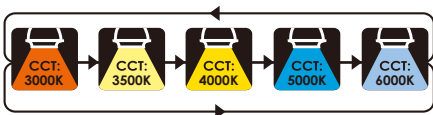


### Extra Junction Box (Sell Separately)

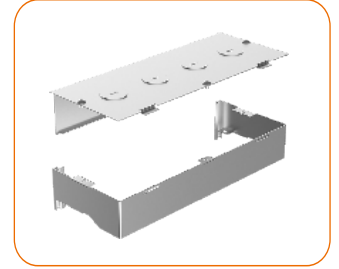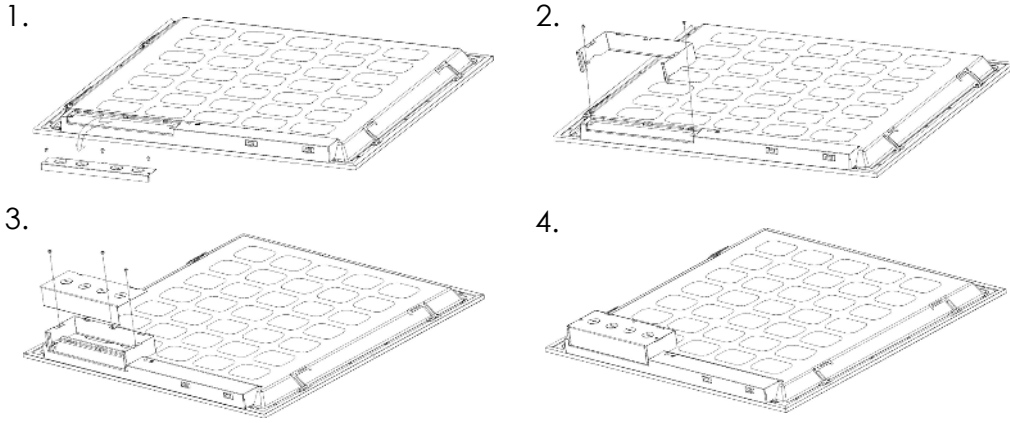


### Dimensions:

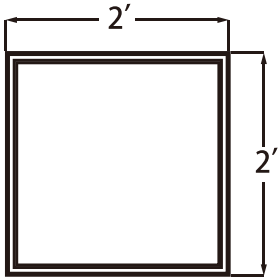

602\*602mm

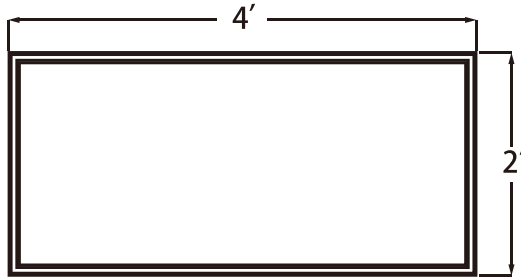

602\*1209mm

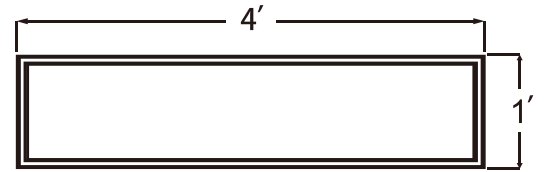

298\*1209mm


### Installation Accessories:



- Spring Clip



- Suspended Kit

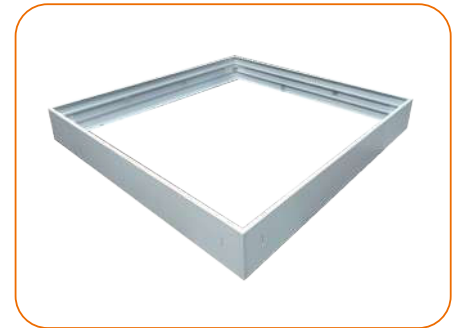

- Surface Mounted Frame