

Flush Mount Fixture



1-2/5"





PMMA



Specification



Model No.:	Size	Power	Brightness	Color Temperature	Input Voltage	Life Time
VO-RF15W24-120-D-3Way SL / BL/GL	15" x 3.8"	24 W	2000 LM	3000K/4000K/5000K	120V	50/000H
VO-RF12W15-120-D-3Way SL / BL/GL	12" x 3.8"	15 W	1200 LM	3000K/4000K/5000K	120V	50/000H
VO-RF18W38-120-D-3Way SL / BL/GL	18" x 3.8"	38W	2900LM	3000K/4000K/5000K	120V	50/000H

Dimensions

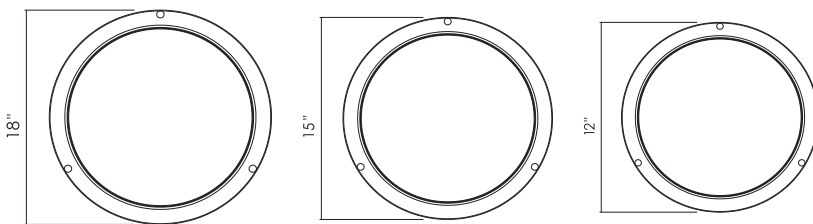


Features:


- Adjustable CCT: 3000K, 4000K or 5000K
- Construction: Iron with white PMMA diffuser
- Input voltage: AC 120V 60/50Hz
- Twin high gauge steel rings surround a smooth white PMMA diffuser for low glow
- %10-%100 dimming capability, This fixture is compatible with most leading and trailing edge TRIAC dimmers
- High performance, easy to install residential grade flush mount solution that offers good output, energy-efficiency and streamlined design
- Color rendering index: 80
- Lifetime rated for greater than 50,000 hours
- Beam angle °120

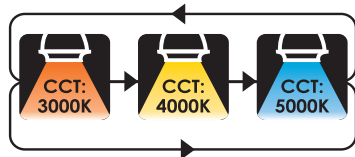

3000K



4000K



5000K

Installation (Junction Box)

FIG 1




FIG 2




FIG 3





FIG 4




FIG 5

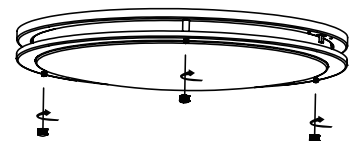


FIG 6

