

WALL FIXTURE

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

IVL902A03313

01/10




TOOLS AND MATERIALS REQUIRED:



Pliers



Wire Cutters



Blade
Screwdriver




Phillips
Screwdriver

Wiring supplies
as required by
the Canadian
Electrical Code
and/or the
Quebec
Electrical code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.
4. NOT FOR USE IN LUMINAIRES CONTROLLED BY A DIMMER.
5. THIS LAMP CONTAINS MERCURY. FOR DISPOSAL LAW, SEE www.lamprecycle.org.


INSTALLATION:

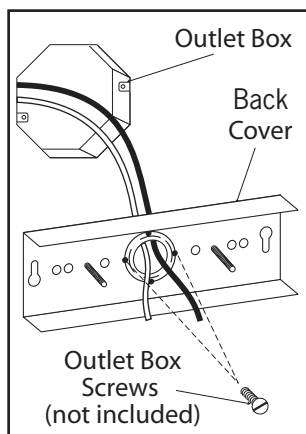



1. Feed power cords from the outlet box through the centre hole of the back cover. Align holes of back cover over outlet box and secure with outlet box screws (not included).

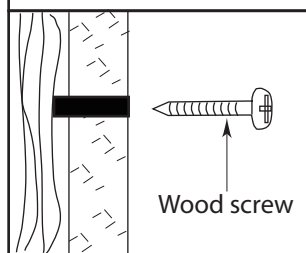


2. Additional support may be required for fixtures longer than 20". Position the fixture and add wood screws (one on each side) for the wooden studs or plastic wall anchor and wood screws for dry wall.

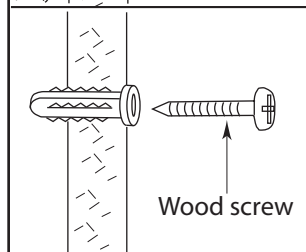


3. Connect the ground wire (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect black wire from fixture to black wire in outlet box and connect the white wire from fixture to white wire in outlet box.

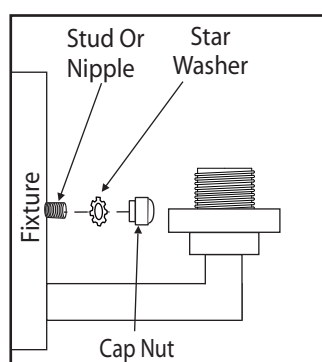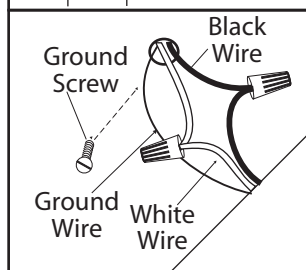

4. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washers and cap nuts.

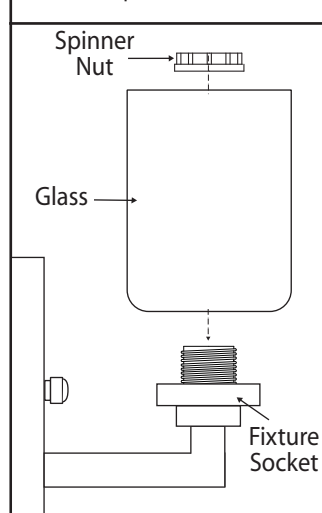

5. Remove spinner nut from socket. Position glass on the fixture and secure with spinner nut.

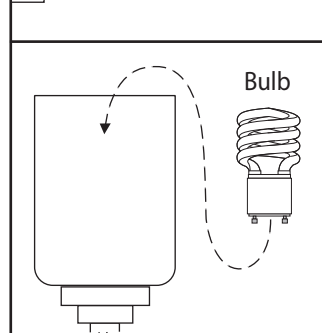

6. Install proper bulb type and wattage.