

RECESSED LIGHT

RL-20 08/15

(FOR INSULATED AND NON-INSULATED CEILING)

OUESTIONS OR CONCERNS CONTACT CANARM AT:


1-800-265-1833 (English) 1-800-567-2513 (French) 1-800-267-4427 (USA) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:




SAFETY PRECAUTIONS:

- 1.TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 3. CAUTION RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 4. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.
- 5. CAUTION: RISK OF FIRE, ONLY USE CANARM TRIM LISTED ON THE RELAMPING LABEL ON THE HOUSING.


6. KEEP INSULATION AT LEAST 3 INCHES AWAY FROM HOUSING IF THIS UNIT IS INSTALLED IN NON-INSULATED CEILING.

NOTE: Product May Not Look Exactly As Shown In Figures.

INSTALLATION:

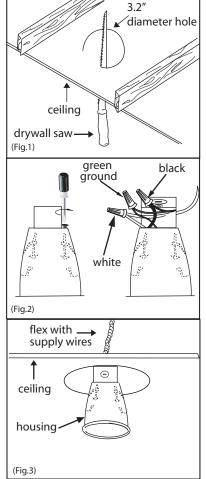

- lo Using 3.2" template on the box, mark the openings and cut the openings with a drywall saw where you intend to install the lights. (Fig.1)
- 2. Unscrew the electrical box. Pull wiring through hole cut out. Using the wire-nut, connect the incoming and outgoing wires by matching white to white, black to black and green to ground wire and twist on. Tighten the electrical box after wiring connections. (Fig.2)
- 3. Lift the housing onto the drywall. (Fig.3)

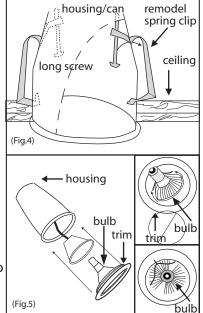

4。Screw the long screws against the back of the can. (Fig.4)

5. For trim style and wattage of bulb, read carefully on the re-lamping label on the housing. Install the proper bulb. (Fig.5)

6. REMARK: FOR NON INSTULATED CEILING INSTALLATION, KEEP INSULATION AT LEAST 3 INCHES AWAY FROM HOUSING.



This LED lamp is not compatible with all dimmers. For more dimmer information, please visit www.canarm.com