

LED Direct PL Replacement Lamps

Features



G23 base



GX23 base

5/7
watts

475-
700
lumens

95+
lpw

G23/
GX23
base

- Plug-and-Play installation for 2-pin G23, GX23 or GX23-2 base (magnetic ballast compatible)
- Lasts 5x longer than compact fluorescent lamps
- Consumes up to 87% less energy than conventional CFL
- Base rotates for precision orientation once installed in fixture
- Choice of 2700K, 3500K, 4000K and 5000K color temperatures
- Environmentally friendly: contains no glass, mercury or lead
- Shatter-resistant for reduced risk of injury and breakage
- Instant-on with no warmup, unlike CFLs
- 5 year limited warranty



Performance

- G23 directly replaces 7W, 9W, 11W dual tube PLS CFL lamps
- GX23 directly replaces 13W dual & quad tube PLS CFL lamps
- GX23 (duo) base version also fits GX23-2 (quad)
- 475-500 lumens @ 5W
- 650-700 lumens @ 7W
- 50,000 hour life @ L70
- 80+ CRI
- UL/cUL classified for damp locations
- 120° beam angle


Applications

- Commercial/Residential
- Hotel/Hospitality
- Education
- Healthcare
- Retail
- Property Management



LED Direct PL Replacement Lamps

Dimensions

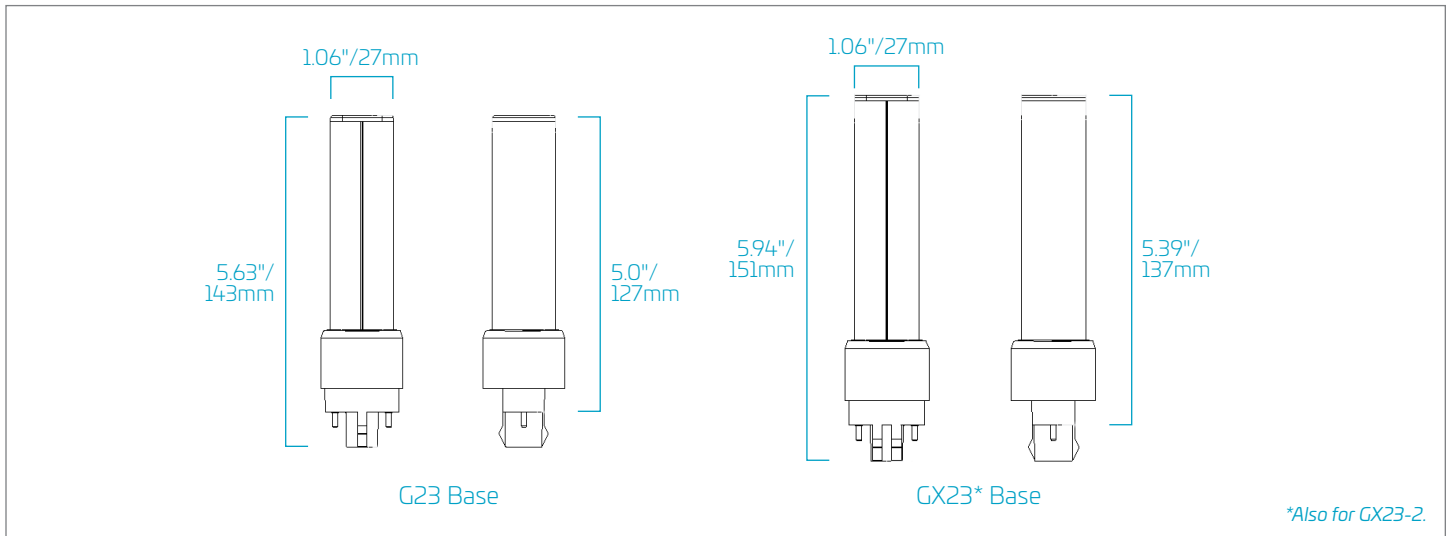

Ordering Information

Order Code	Item #	W	Lm	CCT	CRI	MOL	Orientation	Base	Life/Hrs	Replaces Fluorescent
09526	LED5W2PH/G23/827-G7*	5W	475	2700K	80+	143mm	Horizontal	G23	50K	7/9/11W 2 pin dual
09527	LED5W2PH/G23/835-G7*	5W	475	3500K	80+	143mm	Horizontal	G23	50K	7/9/11W 2 pin dual
09528	LED5W2PH/G23/840-G7*	5W	500	4000K	80+	143mm	Horizontal	G23	50K	7/9/11W 2 pin dual
09529	LED5W2PH/G23/850-G7*	5W	500	5000K	80+	143mm	Horizontal	G23	50K	7/9/11W 2 pin dual
09530	LED7W2PH/GX23/827-G7*	7W	650	2700K	80+	151mm	Horizontal	GX23	50K	13W 2 pin dual & quad
09531	LED7W2PH/GX23/835-G7*	7W	650	3500K	80+	151mm	Horizontal	GX23	50K	13W 2 pin dual & quad
09532	LED7W2PH/GX23/840-G7*	7W	700	4000K	80+	151mm	Horizontal	GX23	50K	13W 2 pin dual & quad
09533	LED7W2PH/GX23/850-G7*	7W	700	5000K	80+	151mm	Horizontal	GX23	50K	13W 2 pin dual & quad

NOTE: Use order code when ordering. Visit eiko.com to view complete ballast compatibility information.

*Not for use with emergency ballasts.

Ballast Compatibility

- Philips Advance H-1B13-TP
- Philips Advance LPL-5-9-TP
- Robertson SP4827P

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335