

Project	
Date	
Prepared by	
Model #	LHB3-905-2-W210

LHB3-SERIES LINEAR HIGH BAY



The LHB3-Series Linear High Bay provides high efficacy and energy savings to projects that require optimized lighting in high ceiling applications. Available in both regular or narrow form factors, these linear high bays are the energy efficient replacements for traditional fluorescent fixtures and HID highbays.



PRODUCT HIGHLIGHTS

- High Efficacy
- Frosted Diffuser for soft, uniform light output
- 1-10V Dimmable
- Instant start, no flickering or humming
- Chain kit included
- Optional mounting options: pendant mount kit, threaded rod kit, ganging kit
- Optional accessories: wirequards











OPTICALSPECIFICATIONS			
Lumen Output (lm)	12663 lm	Beam Angle (°) ₁	100°
CCT (K)	5000K	Projected Lifetime (L ₇₀)	50,000 hours
CRI (Ra)	81	Chromaticity Shift (K)	4745K~5311K
Efficacy (lm/W)	141 lm/W		
ELECTRICAL SPECIFICATIONS			
Power	90W	Output Voltage (VDC)	22-56V
Apparent Power (VA)	91.3VA	Current Draw at 277V _{AC} (A)	0.325A
System Wattage (W)	89W	Current Draw at 347V _{AC} (A)	0.259A
Input Voltage	277-480VAC	Current Draw at 480V _{AC} (A)	0.1875A

PRODUCT DIMENSIONS






CONSTI	RUCTION	LED AND DRIVER	SPECIFICATIONS
Housing Material	Iron	LED Type	2835
Housing Color	White	Dimmable	1-10V
Lens Material	PC	Output Voltage (VDC)	22-56V
Dimensions (incl. town)	24.8" x 12.8" x 2.09"	Power Factor	0.927
Dimensions (inch/mm)	630mm x 325mm x 53mm	THD	7.73%
Includes 10-foot white cord Surface Mounting		Surge Protection	L-N:6KV L/N-PE:10KV
Installation Method	Chain Kit (included) Pendant Kit (optional) Thread Rod Kit (optional) Ganging Kit (optional)	Inrush Current (A)	277V(MAX30A)/347V (MAX38A)/480V(MAX55A)
		Driver Class	Class 2
Weight (kg/lbs)	4.6KG/10.14LBS APPROVALS AND LISTINGS		AND LISTINGS
		DLC Premium	PVMSGZ7T
Operation Range (°F/°C)	-40°C to 50°C / -40°F to 122°F"	UL/ETL	cULus
Warranty	10 Years		
OPTIONAL ACCESSORIES			
LHB-WG3	Wireguards for 90W, 135W, 165W models	LHB-TRSMK23	Surface Mount/Threaded Rod Kit for 277-480V models
LHB-PMK23	Pendant Mount Kit for 277-480V models	LHB-ACK3	Aircraft Cable Kit for all models

CANDELA

Ganging Kit for all models


LHB-GK3

ILLUMINANCE AT A DISTANCE

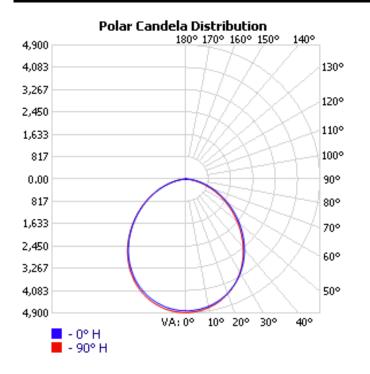


6.6ft / 2M	111.85 fc / 1203.92 LUX
9.8ft / 3M	49.71 fc / 535.08 LUX
13.1ft / 4M	27.96 fc / 300.98 LUX
16.4ft / 5M	17.90 fc / 192.63 LUX
19.7ft / 6M	12.43 fc / 133.77 LUX

PRODUCT KEY

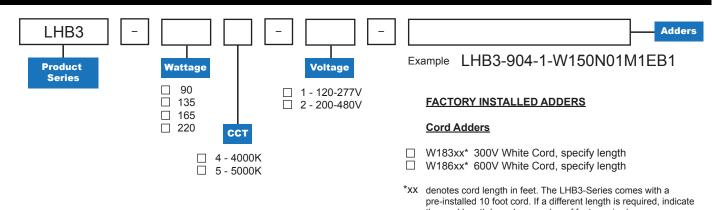

Cord and Sensor Installation Position

When ordering, please specify the knockout positions for cords and sensors.

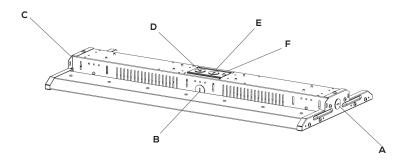

Cord End Adders

N01 N02 N04 N05 N06 N07 N08 N09 N10 N11 N12 N13 N14	5-15P 125V 15A Straight Plug 6-15P 250V 15A Straight Plug L5-15P 125V 15A Locking Plug L6-15P 250V 15A Locking Plug L7-15P 277V 15A Locking Plug 5-20P 125V 20A Straight Plug 6-20P 250V 20A Straight Plug 7-20P 277V 20A Straight Plug L5-20P 125V 20A Locking Plug L6-20P 250V 20A Locking Plug L7-20P 277V 20A Locking Plug L7-20P 277V 20A Locking Plug L24-20P 347V 20A Locking Plug L8-20P 480V 20A Locking Plug

the cord length based on number of feet required.

Motion Sensor Adders

	M1	PIR Motion Sensor (ON/OFF)
	M4	Microwave Motion Sensor 120-277V
П	M5	Microwave Motion Sensor 347-480V

Emergency Battery Adders

20W Emergency Battery Backup (100-277V only) ☐ EB1

Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.

Refer to Warranty Terms & Conditions available at premiseled.com/warranty