

Date:	Fixture:
Qty:	Client/ Project:



Del Task

Retrofit

FEATURES

- Aluminum construction
- 4 and 8 foot length options
- Frosted and clear lens options
- Fits into 4.25" and 5.0" housing



10 Year
Warranty

SPECIFICATIONS

Efficacy:

1x4 4: 164.3 Lm/W
 1x4 5: Up to 144 Lm/W
 1x8 4: 146 Lm/W
 1x8 5: Up to 139 Lm/W

CRI:

86

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

100,000+ Life Hours (L70)

Voltage:

120/277V | 347/480V

Wattages:

20W, 30W, 40W, 60W, 80W

OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
Deltask 1x4-4	21.2	164.3	3,486

Model	Watts	Lm/W	Delivered Lumens
Deltask 1x8-4	31.4	146	4,588

Model	Watts	Lm/W	Delivered Lumens
Deltask 1x4-5	30.7	144.2	4,431
	41.6	141.8	5,909
	60	137.5	8,203

Model	Watts	Lm/W	Delivered Lumens
Deltask 1x8-5	40.1	138.9	5,581
	59.6	137.5	8,203
	80	137	10,960

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/gpl.

delviro energy


94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.


HOUSING

Widths: 4.25" and 5"

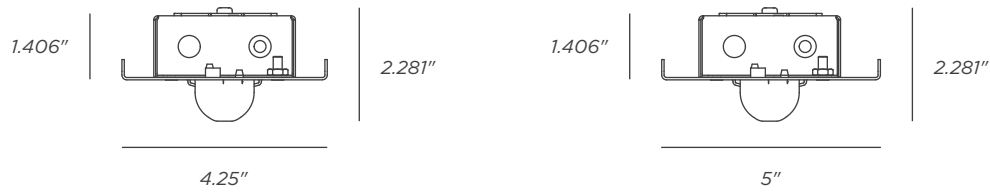


DIMENSIONS

DelTask 1x4

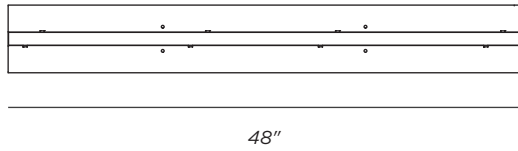

DelTask 1x8

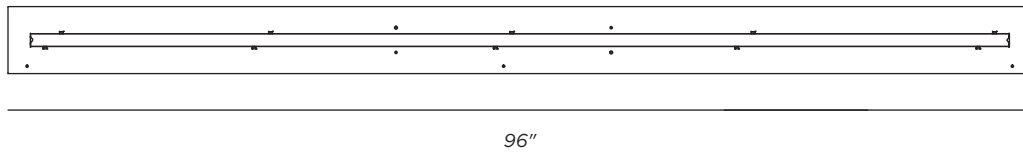

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	LENGTH	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH
Del Task 4	1x4	20	3K 3000K	U 120/277V	CL Clear	WH White
Del Task 5	1x4	30, 40, 60	35K 3500K	H 347/480V	FR Frosted	
Del Task 4	1x8	30	4K 4000K		NL No Lens	
Del Task 5	1x8	40, 60, 80	5K 5000K			
						WH

MOUNTING	PLUG
4.25 4.25" Housing	N None
5 5" Housing	•See Plug Options

PLUG OPTIONS
5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15