




SLS-02 SERIES SIGN LIGHT

TYPE

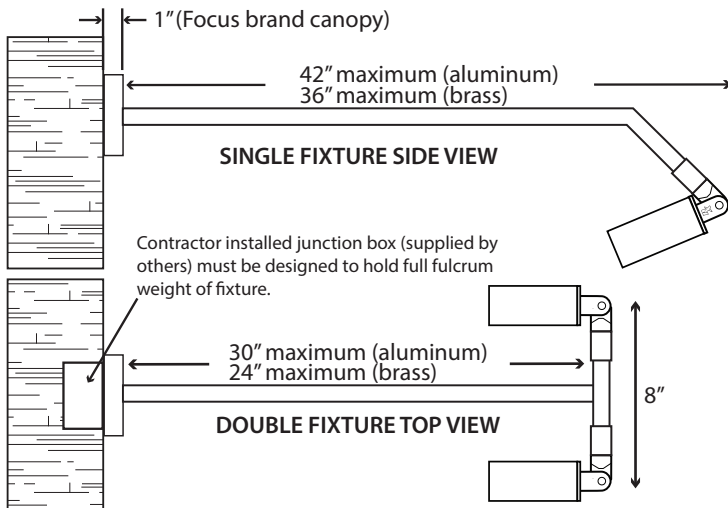

SPECIFICATIONS

Aluminum: Die cast bullet and adjustable die cast 240° swivel*; extruded aluminum extension pole
Copper: Unfinished copper bullet; adjustable die cast brass swivel; die cast brass canopy; copper or brass extruded extension pole

Max Wattage: Aluminum 50w / Copper 35w

Lamp Options: MR16, MR16 LED



Socket:
 12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

Wiring:
 12v - Black 18/2 SPT-1W 8" from base of fixture

Power Supply:
 12v - Remote 12v transformer or internal hard wire transformer (not included)

Finish: See color options in ordering information below

*** NOTE: 45° bend required for full rotation of single fixture towards wall. Consult factory for other swivel options.**

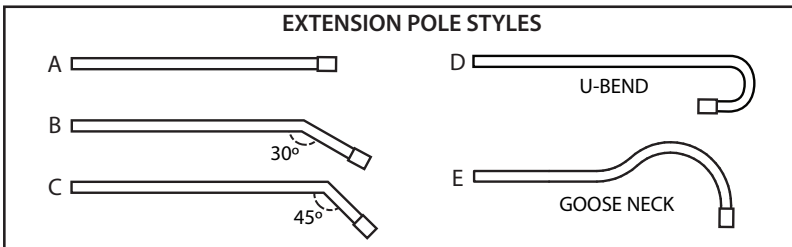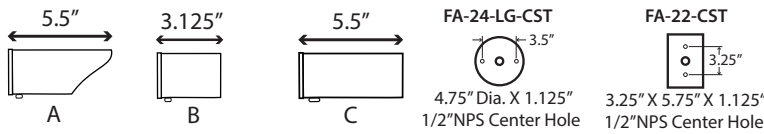

IP54



SLS-02- _____ 1 _____ 2 _____ 3 _____ 4 _____ 5 _____ 6 _____ 7 _____ 8 _____ 9 _____ 10 _____ 11 _____

ORDERING INFORMATION

1. MATERIAL	
A: ALUMINUM RXD02 12 V	
B: ALUMINUM RXD02 GU10 120V	
C: COPPER / BRASS POLE RXD02 12 V	
D: COPPER / BRASS POLE RXD02 GU10 120 V	
2. FIXTURE TYPE	
1: SINGLE	
2: DOUBLE (ALUMINUM)	
3: DOUBLE (BRASS POLE)	
3. LIGHT SOURCE	
NL: NO LAMP	
1: 3W ARROW SUPER SAVER MR16 15°	L22
2: 3W ARROW SUPER SAVER MR16 36°	L24
3: 3W ARROW SUPER SAVER MR16 80°	L26
4: 5W ARROW SUPER SAVER MR16 15°	L34
5: 5W ARROW SUPER SAVER MR16 36°	L36
6: 5W ARROW SUPER SAVER MR16 80°	L38
7: 7W ARROW SUPER SAVER MR16 15°	L46
8: 7W ARROW SUPER SAVER MR16 36°	L48
9: 7W ARROW SUPER SAVER MR16 80°	L50
10: 3W ARROW SUPER SAVER MR16 15° GU10	L106
11: 3W ARROW SUPER SAVER MR16 36° GU10	L108
12: 3W ARROW SUPER SAVER MR16 80° GU10	L110
13: 5W ARROW SUPER SAVER MR16 15° GU10	L114
14: 5W ARROW SUPER SAVER MR16 36° GU10	L116
15: 5W ARROW SUPER SAVER MR16 80° GU10	L118
16: 7W ARROW SUPER SAVER MR16 15° GU10	L124
17: 7W ARROW SUPER SAVER MR16 36° GU10	L126
18: 7W ARROW SUPER SAVER MR16 80° GU10	L128
4. CAP STYLE	
A: ANGLE CAP	
B: FLAT CAP	
C: TUBE SHIELD	
5. LENS TYPE	
1: CONVEX	
2: FLAT	

6. LENS ENHANCEMENT	
0: NO LENS ENHANCEMENT	
A: LINEAR SPREAD	
B: WIDE SOFTENER COPPER MODELS	
C: WIDE SOFTENER ALUMINUM MODELS	
D: BLUE	
E: GREEN	
7. GLARE SHIELDING	
0: NO SHIELDING	
H: HEX CELL LOUVER	
8. EXTENSION POLE LENGTH	
12: 12 INCHES	
18: 18 INCHES	
24: 24 INCHES (MAX FOR DOUBLE BR)	
30: 30 INCHES (MAX FOR DOUBLE ALUM)	
36: 36 INCHES (SINGLE ONLY, MAX BR)	
42: 42 INCHES (SINGLE ONLY ALUM)	
CUSTOM: (ADDER PER INCH)	
9. EXTENSION POLE STYLE	
A: STRAIGHT	
B: 30° BEND	
C: 45° BEND	
D: U BEND (PROVIDE SPEC)	
E: GOOSE NECK (PROVIDE SPEC)	
F: CUSTOM BEND (PROVIDE SPEC)	
10. CANOPY	
0: NO CANOPY (1/2" NPS REQUIRED)	
1: FA-24-LGCST ALUM ROUND	
2: FA-24-LGCST BRASS ROUND	
3: FA-22-CST ALUM RECTANGLE	
4: FA-22-CST BRASS RECTANGLE	
11. COLOR	
BLT/BRT: BLACK OR BRONZE TEXTURE (STANDARD, ALUMINUM ONLY)	
OTHER POWDER COLOR FIXTURE	
OTHER POWDER COLOR POLE	
OTHER POWDER COLOR CANOPY	
COPPER: UNFINISHED COPPER (STANDARD)	
OTHER ACID TREATMENT FIXTURE	
OTHER ACID TREATMENT POLE	
OTHER ACID TREATMENT CANOPY	