

Type IC & Air-Tight



### DESCRIPTION

4" Recessed LED With Integral Driver In Connection Box  
Round & Square Options for Trims



### FEATURES & BENEFITS

- 1,000 Lm Output - High Performance Fixture
- CRI 90+ for True Color Rendering
- 3 1/2" Thick - Install Where Ceiling Space Is Limited
- Type IC Rated - No Housing Required
- Fast & Easy To Install - Save On Labor
- Driver Inside Connection Box - No Junction Box Needed

**DIMENSIONS** ID 3 1/8" OD 4 1/2" Cut Out 3 3/4"

Ceiling Clearance Required: 3 1/2"

120V Triac Dimmable Driver Included

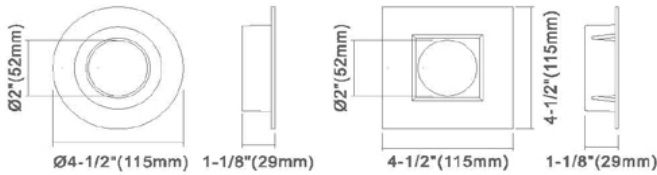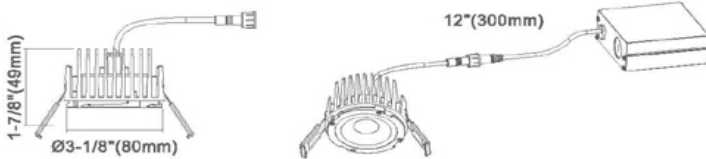

### ORDERING GUIDE

AD-LED-4-S15W	CCT	Trim
	- xxK	- T4xx

Example: 30K Round White Trim  
AD-LED-4-S15W-30K-T4RW

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Trim: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Commercial & Residential Recessed
Energy Used	15 W
Color Temperature (K)	3000   4000
Light Output (lm)	1000   1020
Halogen Equivalent	100 W
Beam Angle	40°
CRI	90 +
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star, T24
Warranty	5 Year


### Stock Trims



**T4RW**  
Round White



**T4RB**  
Round Black



**T4SW**  
Square White



**T4SB**  
Square Black

Other Trim Colors Available By Custom Order

### ACCESSORIES

Sold Separately



Mounting Plate Flat cat # **MP4-2**



Mounting Plate Flanged cat # **MP4**



Jumper Cable 10 ft cat # **JC10**  
Maximum Extension 40 feet