

NL-420 / NL-421

4" White Trim with 2" Pinhole and Black Baffle

Type

Project

Catalog No.

Notes

FEATURES

Trim: Metal trim with 2" pinhole. Plastic baffle with deep grooves to reduce aperture glare. Gimbal ring allows lamp to be mounted on top of the trim.

Mounting: Trim includes three trim clips that securely mounts inside the housing.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL;
NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)
45W PAR16 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)


IMPORTANT: DO NOT USE GLASS LENS WHEN ALREADY USING LAMP WITH GLASS COVER

LISTINGS

cULus Listed for Damp Locations



PRODUCT IMAGES AND DIMENSIONS

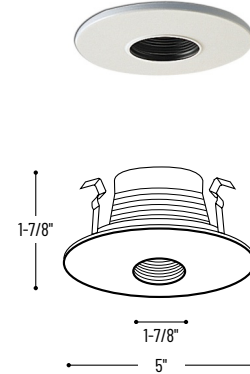

Compatible Housings

Catalog No.

Low Voltage

NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W
NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W
NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W
NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W
NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

NSEIC-407AT/20 = ICAT LED New Construction / 20W
NSERIC-407AT/20 = ICAT LED Remodel / 20W
NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W
NSLIC-401AT/10 = ICAT New Construction / 50W
NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W
NS-401AT/10 = Non-IC Air-Tight New Construction / 45W PAR16
NSIC-401AT = IC Air-Tight New Construction / 45W PAR16
NSR-404QAT = Non-IC Air-Tight Remodel / 45W PAR16

4" White Trim with 2" Pinhole and Black Baffle

Catalog No.

NL-420 = 4" White Metal Trim with 2" Pinhole and Black Baffle
NL-421 = 4" White Metal Trim with 2" Pinhole and White Baffle

Example: **NL-420** = 4" White Metal Trim with 2" Pinhole and Black Baffle